

Toshiba Air Conditioning - RAV-SM Data Sheet

RAV-SM567CTP-E Ceiling-suspended

Features

- R22 and R407C replacement technology
- The best solution when no ceiling void is available
- Self-cleaning
- Air flow angle is automatically set to the most suitable setting, according to requirements






Technical Data

Model reference		RAV-SM567CTP-E
Nominal cooling	kW	5.0
Nominal heating	kW	5.3
Annual power consumption (SM/SP*)	kWh	750/685
UK cooling (SM/SP*)	kW	4.8/4.8
UK sensible cooling (SM/SP*)	kW	3.6/3.6
UK heating (SM/SP*)	kW	3.79/3.66
Starting current (SM/SP*)	A	1/1
Running current (SM/SP*)	A	7.46/6.35
Suggested fuse size (SM/SP*)	A	16/16
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		3 core + earth
Sound power (high/low)	dB(A)	52/43
Sound pressure (high/low)	dB(A)	37/28
Air flow (high/low)	m ³ /h	900/540
Air flow (high/low)	l/s	250/150
Dimensions (H x W x D)	mm	235 x 950 x 690
Unit weight	kg	23
Energy label (cool/heat - SM/SP*)	V-ph-Hz	A/A+ - A/A+
EER/COP - SM/SP*		3.21/3.89 - 3.65/4.38
SEER/SCOP - SM/SP*		6.11/4.21 - 5.45/4.28
Pipe sizes (liquid-suction)	inch	1/4-1/2

* Refers to outdoor combination SM = Digital Inverter SP = Super Digital Inverter

Dimensional Drawings

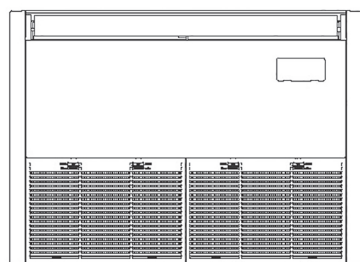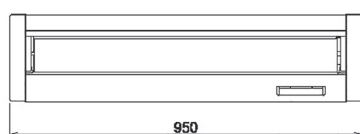

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

