

Toshiba Air Conditioning - RAV-SM Data Sheet

RAV-SM807CTP-E Ceiling-suspended

Features

- R22 and R407C replacement technology
- The best solution when no ceiling void is available
- Self-cleaning
- Air flow angle is automatically set to the most suitable setting, according to requirements





Technical Data

Model reference		RAV-SM807CTP-E
Nominal cooling	kW	6.9
Nominal heating	kW	8.0
Annual power consumption (SM/SP*)	kWh	1190/930
UK cooling (SM/SP*)	kW	6.6/6.8
UK sensible cooling (SM/SP*)	kW	5.1/5.2
UK heating (SM/SP*)	kW	5.5/5.2
Starting current (SM/SP*)	A	1/1
Running current (SM/SP*)	A	11.51/9.00
Suggested fuse size (SM/SP*)	A	16/16
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		3 core + earth
Sound power (high/low)	dB(A)	56/44
Sound pressure (high/low)	dB(A)	41/29
Air flow (high/low)	m ³ /h	1410/750
Air flow (high/low)	l/s	392/208
Dimensions (H x W x D)	mm	235 x 1270 x 690
Unit weight	kg	29
Energy label (cool/heat - SM/SP*)	V-ph-Hz	A+/A+ - A++/A+
EER/COP - SM/SP*		2.90/3.74 - 3.82/4.17
SEER/SCOP - SM/SP*		6.11/4.01 - 6.21/4.10
Pipe sizes (liquid-suction)	inch	3/8-5/8

* Refers to outdoor combination SM = Digital Inverter SP = Super Digital Inverter

Dimensional Drawings

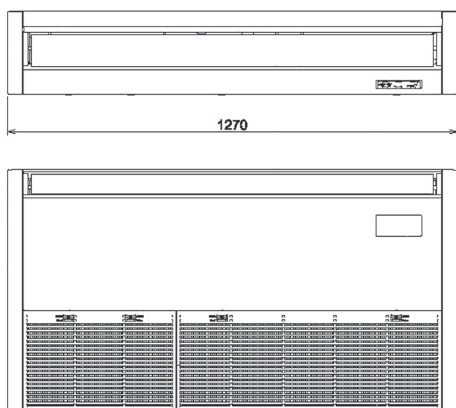

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

