



CIAT - COADIS LINE 600 Cassette fan coil unit

COADIS LINE 600 Cassette fan coil unit

Features

- Suction/discharge through 180° or 360° FLEXIWAY grille.
- Installation in reduced ceilings with modern styling.
- Air supply with Coanda effect for guaranteed comfort.
- Epure filter for excellent air quality.
- Manufactured according to eco-concept, 87% recyclable.
- Quiet, standard or energy-efficient HEE motor.



Technical Data

For cooling or heating (2-pipe)						
Unit		Cooling	Heating	Dimensions - W x D x H	Weight	Part Number
Coadis Line	Motor	W	W	mm	kg	
612	Standard	2040	2980	584 x 584 x 334	18.5	7401354
622	Standard	2600	3610	584 x 584 x 334	20.0	7401355
632	Standard	4290	5500	584 x 584 x 334	21.5	7401356
612	HEE	2040	2980	584 x 584 x 334	18.5	7401351
622	HEE	2600	3610	584 x 584 x 334	20.0	7401352
632	HEE	4290	5500	584 x 584 x 334	21.5	7401353

For cooling or heating (4-pipe)						
Unit		Cooling	Heating	Dimensions - W x D x H	Weight	Part Number
Coadis Line	Motor	W	W	mm	kg	
624	Standard	2600	3660	584 x 584 x 334	20.5	7401359
634	Standard	4290	3720	584 x 584 x 334	22.0	7401360
624	HEE	2600	3660	584 x 584 x 334	20.5	7401357
634	HEE	4290	3720	584 x 584 x 334	22.0	7401358


Select from 1-way or 4-way grille

Description	Part Number
180° suction/discharge grille with Epure filter 600	7350577
360° suction/discharge grille with Epure filter 600	7350575

All units are supplied with an Epure air filter as standard. These Epure filters need to be replaced periodically. Replacement filters can be found at the back of this price list.

The above capabilities are based on Eurovent conditions. For 2-pipe unit, cooling with an air inlet temperature of 27°C/WB 19°C and a water range of 7-12°C, heating with an air inlet temperature of 20°C/50% RH and a water inlet of 50°C at high fan speed. For 4-pipe unit, cooling with an air inlet temperature of 27°C/WB 19°C and a water range of 7-12°C, heating with an air inlet temperature of 20°C/50% RH and a water range of 70-60°C at high fan speed. Alternative 2-pipe units are available with electric heating. CIAT participates in the Eurovent certification program. For a list of products and certified characteristics, please refer to www.eurovent-certification.com.

Dimensional Drawings

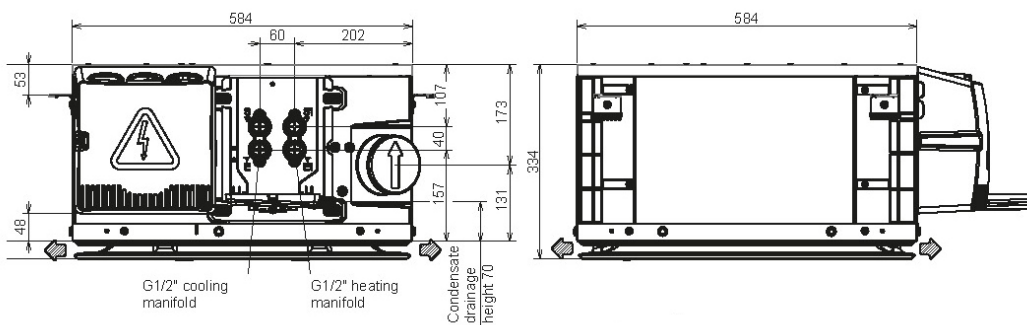

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info





CIAT - COADIS LINE 600 Cassette fan coil unit

COADIS LINE 600
Cassette fan coil unit



Available unit options

Description	Part Number
Increased performance kit	7301625
4-way water control valve* (2-pipe)	E037567
2-way water control valve* (2-pipe)	E037605
2-piece 4-way water control valve* (4-pipe)	E037583
2-piece 2-way water control valve* (4-pipe)	E037621
Condensate pump*	7301623
Wall-mounted thermostat RTR 7011/RTR 7203*	5201018/5201021
Set of mounting rubbers (per unit)*	Set = 4 x 0219453

* Options supplied separately. All water control valves, equipped with 230 V/1 ph/50 Hz thermal actuator (open/closed). Other arrangements on request.

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

