



CIAT - FLOWAY VERTICAL

Air handling unit

FLOWAY VERTICAL

Air handling unit

Features

- Self-supporting construction.
- Double-wall casing with 50 mm insulation.
- Pre-lacquered outer panel, galvanized inner panel.
- Fire rating A1/M0.
- Air speed 300-2,600 m³/h.
- Wide range of options available.
- For indoor use with compact unit dimensions.
- Plug fan with brushless EC motor.
- Carel pC03 controller included.
- Counter-flow heat exchanger.




Technical Data

Floway Vertical		700	1500	2000
Minimum air flow	m ³ /h	300	700	700
Maximum air flow	m ³ /h	1200	2000	2600
Maximum power input	kW	1.43	2.50	2.50
Maximum current	A	6.2	3.6	3.6
Width x height	mm	700 x 1340	800 x 1712	800 x 1854
Length	mm	1272	1550	1692
Weight	kg	202	330	389
Power supply	V/ph/Hz	220-240/1/50	380-415/3/50	380-415/3/50

Floway Vertical	Plate heat exchanger with variable speed M5 and F7, plate heat exchanger, EC plug fan, Modbus, display
-----------------	--

Dimensional Drawings

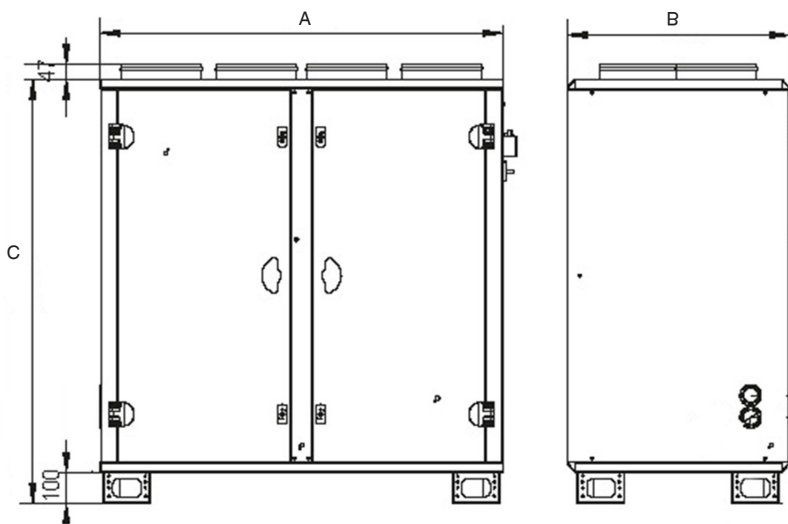

Model	Length (A), mm	Width (B), mm	Height (C), mm
700	1272	700	1340
1500	1550	800	1712
2000	1692	800	1854

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info





CIAT - FLOWAY VERTICAL Air handling unit

FLOWAY VERTICAL Air handling unit



Accessories

Description

Intake motorised damper
Flexible intake sleeve
Built-in single-stage electric heater
Built-in 1-row heating coil with valves
External single-stage electric heater
External 1-row heating coil with valves
External 2-row heating/cooling coil with valves
External 3-row heating/cooling coil with valves

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

