

AIRSTAGE™ Wall Mounted

ASYA007/009GTAH

Compact & Comfort



Optimised design matches to a small room

Point

Ø5mm high density heat exchanger is mounted for the first time in the industry. Efficient operation and refrigerant saving are realised by optimum heat exchanger design suited for small rooms.

Office




Hotel room



Stylish exterior design



High density heat exchanger




Making the tube thin:
7 mm → 5 mm

Increase of heat exchanger volume by high density and adopting sub heat exchanger

Easy installation

Point

Communication wiring can be installed easily by only opening the front panel and wire cover.

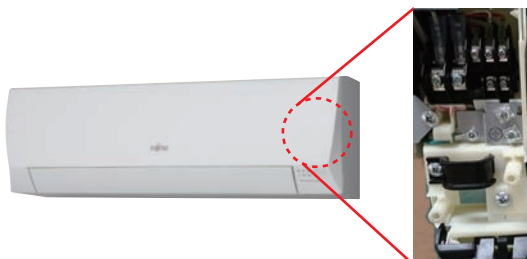

Easy maintenance

Point

Easy maintenance has been realised as the front panel can be removed for easy access.




6 Fan Speed Control

Multistep airflow control is possible to suit the environment.

Fan speed
Quiet

Noise level
22 dB(A)



* Compatible Remote Controller is as follows:
UTY-RNRY22 / UTY-RSRY / UTY-RHRY / UTY-DCGY / UTY-DTGYZ1 / UTY-ALGX / UTY-APGX

Specifications

Model name		ASYA007GTAH		ASYA009GTAH	
Power source		Single-phase, ~230V, 50Hz			
Capacity	UK Total Cooling	kW	1.60	2.10	
	UK Sensible Cooling		1.60	1.90	
	UK Heating		2.60	3.00	
	Nominal Cooling		2.20	2.80	
	Nominal Heating		2.80	3.20	
Input power		W	19	34	
Airflow rate	High	m ³ /h	550	720	
	Med-H		460	570	
	Med		420	500	
	Med-L		390	410	
	Low		360	360	
	Quiet		330	330	
Sound pressure level	High	dB(A)	35	43	
	Med-H		32	38	
	Med		30	34	
	Med-L		27	29	
	Low		24	24	
	Quiet		22	22	
Dimensions (H × W × D)		mm	262 x 820 x 206		
Weight		kg	7.5		
Connection pipe diameter	Liquid (Flare)	Inch	1/4		
	Gas (Flare)		3/8		

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

UK Cooling : Indoor temperature of 23°CDB / 16°CWB, and outdoor temperature of 30°C

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m.Voltage : 230 [V].


• When ASY*007GTAH, ASY*009GTAH are connected to the outdoor unit other than J-IHLL, gas pipe diameter should be Ø12.70.

Dimensions

Models:

ASYA007GTAH / ASYA009GTAH

(Unit : mm)

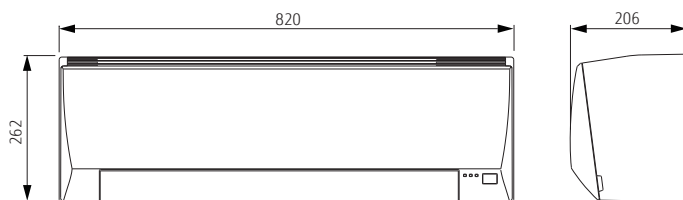

Optional parts

Wired Remote Controller: UTY-RNRY22

Wireless Remote Controller: UTY-LNHY

Simple Remote Controller: UTY-RSRY, UTY-RHRY

• Specifications and design are subject to change without notice for further improvement.

• "AIRSTAGE" are worldwide trademarks of FUJITSU GENERAL LIMITED and are registered trademarks in Japan and other countries or areas.

• Other company and product names mentioned herein may be registered trademarks, trademarks or trade names of their respective owners.

• Actual products' colours may be different from the colors shown in this printed material.

Distributed by:

FUJITSU GENERAL AIR CONDITIONING (UK) LTD
Unit 150 Centennial Park, Centennial Avenue, Elstree, Herts. WD6 3SG
www.fujitsu-general.com/uk

Tel: +44 (0)208 731 3450 Fax: +44 (0)208 731 3451

Copyright© 2016 Fujitsu General Limited. All rights reserved. 6EFNP9-1612E