

### AIRSTAGE™ Wall Mounted

ASYA18/24GBCH  
ASYA030/034GTAH

New design & large capacity



ASYA18/24GBCH



ASYA030/034GTAH

### Stylish Flat Design

Point


New design matches to any interior decoration



### Powerful & Comfort airflow

Point

**Power diffuser**  
(ASYA18/24GBCH)




**Powerful Airow**  
(ASYA30)



### Human sensor (ASYA030/034GTAH only)



Point

A human sensor senses the movement of humans to reduce operation when one is in the room. the wasteful consumption of energy is reduced automatically to keep down electricity bills.  
(Available to wired remote controller as UTY-RNRYZ2)

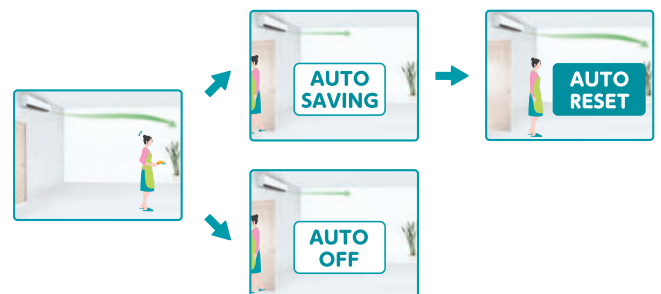

# Quiet operation & 6 Fan speed control

Drastic low noise is realised by new airflow structure. In addition, multistep quiet operation is available by 6-step sound level settings.



\* Compatible Remote Controller is as follows:  
UTY-RNRYZ2 / UTY-RSRY / UTY-RHRY / UTY-DCGY / UTY-DTGYZ1 / UTY-ALGX / UTY-APGX

## Specifications

Model name	ASYA18GBCH		ASYA24GBCH		ASYA030GTAH		ASYA034GTAH	
Power source	Single-phase, ~230V, 50Hz							
Capacity	UK Total Cooling	kW	4.20	5.30	6.70	7.40		
	UK Sensible Cooling		3.90	4.80	6.00	6.50		
	UK Heating		5.90	7.40	9.30	10.40		
	Nominal Cooling		5.60	7.10	9.00	10.00		
	Nominal Heating		6.30	8.00	10.00	11.20		
Input power		W	32	60	74	103		
	High		840	1,100	1,440	1,620 / 1,520		
Airflow rate	Med-H	m <sup>3</sup> /h	-	-	1,200	1,300		
	Med		770	910	1,050	1,120		
	Med-L		-	-	940	980		
	Low		690	730	890	890		
	Quiet		-	-	700	700		
	High		41	48	53	55 / 54		
Sound pressure level	Med-H	dB(A)	-	-	49	51		
	Med		39	43	45	47		
	Med-L		-	-	42	43		
	Low		35	35	39	39		
	Quiet		-	-	33	33		
Dimensions (H × W × D)	mm	320 x 998 x 238				340 x 1,150 x 280		
Weight	kg	15				18		
Connection pipe diameter	Liquid (Flare)	Inch	1/4		3/8			
	Gas (Flare)		1/2		5/8			

Note : Specifications are based on the following conditions.  
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

When ASYA18GBCH is connected to the outdoor unit other than J-III, pipe diameter should be Ø9.52/Ø15.88 (Liq/Gas).



## Dimensions

### Models:

ASYA18GBCH / ASYA24GBCH

ASYA030GTAH / ASYA034GTAH

(Unit : mm)

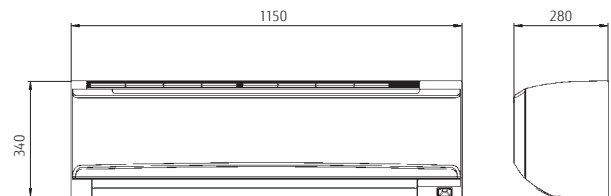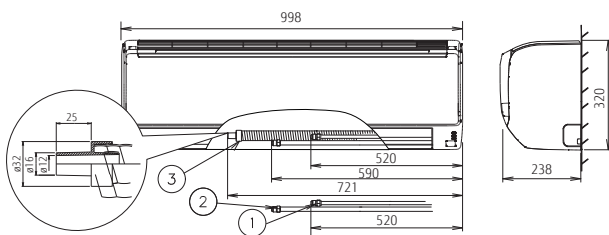

- ① Refrigerant pipe flare connection (Liquid)
- ② Refrigerant pipe flare connection (Gas)
- ③ Drain hose connection (Drain hose)

## Optional parts

Wired Remote Controller: UTY-RNRYZ2

Wireless Remote Controller: UTY-LNHY

Simple Remote Controller: UTY-RSRY, UTY-RHRY

- Specifications and design are subject to change without notice for further improvement.
- "AIRSTAGE™" are worldwide trademarks of FUJITSU GENERAL LIMITED and are registered trademarks in Japan and other countries or areas.
- Other company and product names mentioned herein may be registered trademarks, trademarks or trade names of their respective owners.

• Actual products' colours may be different from the colours shown in this printed material.  
Distributed by:

**FUJITSU GENERAL AIR CONDITIONING (UK) LTD**

Unit 150 Centennial Park, Centennial Avenue, Elstree, Herts. WD6 3SG  
www.fujitsu-general.com/uk

Tel: +44 (0)208 731 3450 Fax: +44 (0)208 731 3451

Copyright© 2016 Fujitsu General Limited. All rights reserved. 6EFNP10-1612E