

Toshiba Air Conditioning - VRF Data Sheet

MMY-MAP2206HT8P-E

Two-pipe SMMSe - Heat Pump Condensing Unit

Features


- New DC twin rotary compressor with DLC coated vane
- Wave interface communication tool for Smartphone (Android) commissioning and data transfer
- Longer pipe lengths up to 1000 m
- Increased connectable capacity up to 64 indoor units
- New sub-cooling heat exchanger for improved energy efficiency
- High efficiency combinations 20 hp to 54 hp



Technical Data

Model reference		MMY-MAP2206HT8P-E
Nominal cooling	kW	61.5
Nominal heating	kW	64.0
Capacity code		22
Min./max. capacities connectable	hp	11/29.7
Power input (cool/heat)	kW	23.2/17.1
SEER/ESEER Value (Office Profile)		6.60/7.47
SCOP/ESCOP Value (Office Profile)		4.72/5.11
Starting current	A	1
Running current (cool/heat)	A	35.6/26.5
Suggested fuse size	A	40
Power supply	V-ph-Hz	400-3-50
Interconnecting cable		2-core screened 1.5 mm
Sound power (cool/heat)	dB(A)	83/84
Sound pressure (cool/heat)	dB(A)	61/62
Standard air flow	m ³ /h	18500
Standard air flow	l/s	5139
Maximum indoor units connectable		49
Dimensions (H x W x D)	mm	1830 x 1600 x 780
Unit weight	kg	371
R410A refrigerant base charge	kg	11.5

Dimensional Drawings

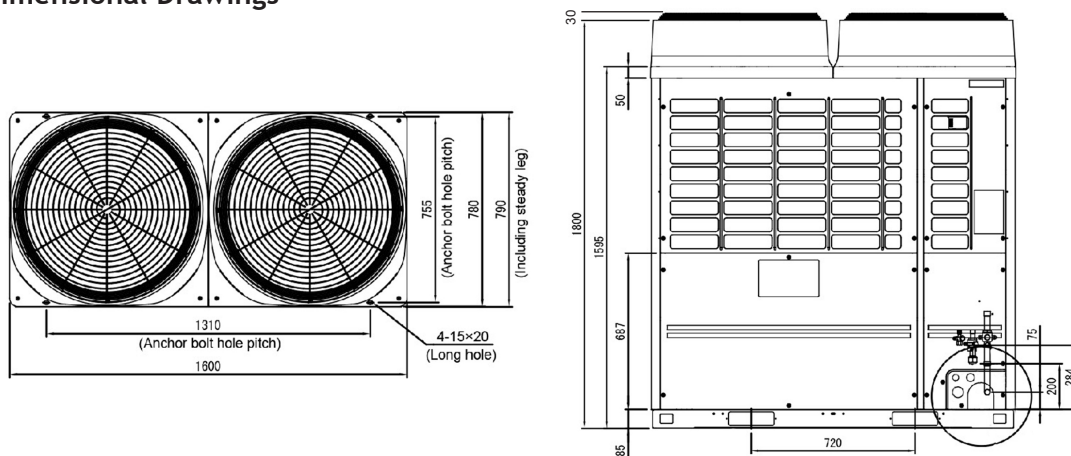

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

