

Toshiba Air Conditioning - VRF Data Sheet

MMC-AP0157HP-E Ceiling suspended

Features



- The best solution when no ceiling void is available
- Fresh air intake
- Optimum louvre control
- Hard-wired or infra-red remote control option



Technical Data

Model reference		MMC-AP0157HP-E
Nominal cooling	kW	4.5
Nominal heating	kW	5.0
Capacity code		1.7
Power input (cool/heat)	kW	0.033
UK cooling	kW	4.0
UK sensible cooling	kW	3.1
UK heating	kW	4.3
Starting current	A	0.54
Running current	A	0.033
Suggested fuse size	A	5
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		2-core screened 1.5 mm
Sound power H-M-L	dB(A)	51-49-43
Sound pressure H-L	dB(A)	36-28
Air flow H-L	m ³ /h	840-540
Air flow H-L	l/s	233-150
Dimensions (H x W x D)	mm	235 x 950 x 690
Unit weight	kg	23

Dimensional Drawings

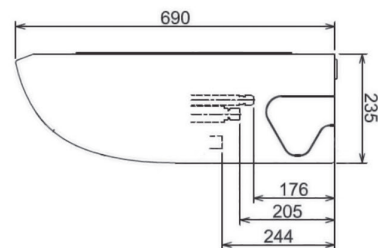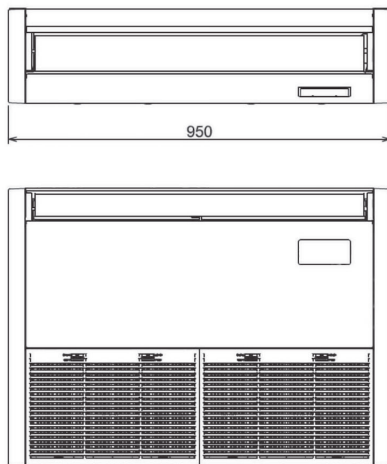

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

