

Toshiba Air Conditioning - VRF Data Sheet

MMC-AP0277HP-E Ceiling suspended

Features



- The best solution when no ceiling void is available
- Fresh air intake
- Optimum louvre control
- Hard-wired or infra-red remote control option



Technical Data

Model reference		MMC-AP0277HP-E
Nominal cooling	kW	8.0
Nominal heating	kW	9.0
Capacity code		3.0
Power input (cool/heat)	kW	0.067
UK cooling	kW	7.1
UK sensible cooling	kW	5.1
UK heating	kW	7.0
Starting current	A	0.97
Running current	A	0.065
Suggested fuse size	A	5
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		2-core screened 1.5 mm
Sound power H-M-L	dB(A)	56-51-44
Sound pressure H-L	dB(A)	41-29
Air flow H-L	m ³ /h	1440-750
Air flow H-L	l/s	400-217
Dimensions (H x W x D)	mm	235 x 1270 x 690
Unit weight	kg	29

Dimensional Drawings

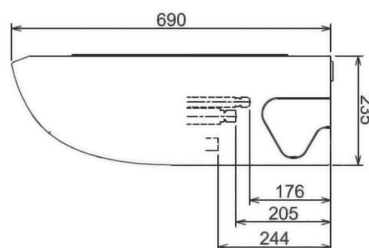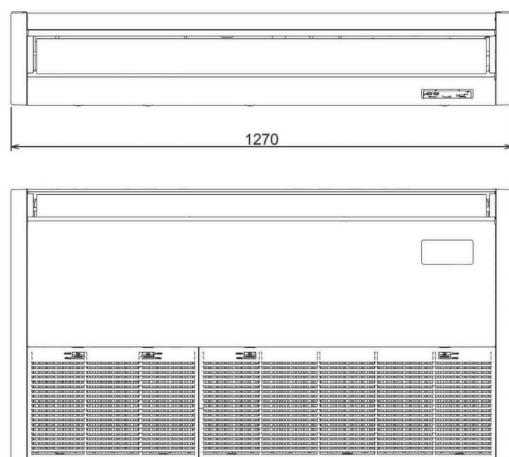

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

