

Toshiba Air Conditioning - VRF Data Sheet

MMC-AP0367HP-E Ceiling suspended

Features



- The best solution when no ceiling void is available
- Fresh air intake
- Optimum louvre control
- Hard-wired or infra-red remote control option



Technical Data

Model reference		MMC-AP0367HP-E
Nominal cooling	kW	11.2
Nominal heating	kW	12.5
Capacity code		4.0
Power input (cool/heat)	kW	0.083
UK cooling	kW	10.0
UK sensible cooling	kW	6.7
UK heating	kW	10.0
Starting current	A	1.16
Running current	A	0.77
Suggested fuse size	A	5
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		2-core screened 1.5 mm
Sound power H-M-L	dB(A)	59-53-47
Sound pressure H-L	dB(A)	44-32
Air flow H-L	m ³ /h	1860-1020
Air flow H-L	l/s	517-283
Dimensions (H x W x D)	mm	235 x 1586 x 690
Unit weight	kg	35

Dimensional Drawings

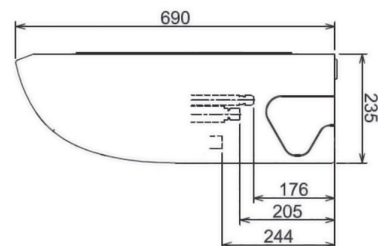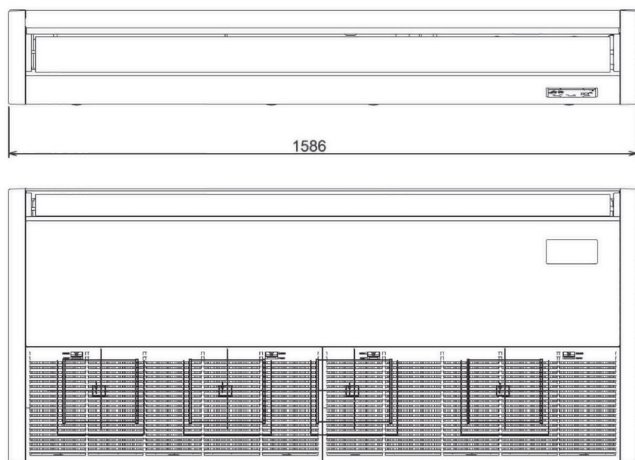

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

