

## Toshiba Air Conditioning - VRF Data Sheet

**MMD-AP0076BHP-E**

**Standard ducted**

### Features


- External static pressure can be raised up to 120 Pa
- Low noise: low fan speed down to 23 dB(A)
- Fresh air intake
- Lift pump up to 850 mm lift
- Ideal for restricted ceiling voids only 275 mm high
- Base or rear return air



### Technical Data

Model reference		MMD-AP0076BHP-E
Nominal cooling	kW	2.2
Nominal heating	kW	2.5
Capacity code		0.8
Power input (cool/heat)	kW	0.039
UK cooling	kW	2.11
UK sensible cooling	kW	1.59
UK heating	kW	2.03
Starting current	A	0.45
Running current	A	0.26
Suggested fuse size	A	5
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		2-core screened 1.5 mm
Sound power H-M-L	dB(A)	44-41-38
Sound pressure H-L	dB(A)	29-23
Standard air flow H-L	m <sup>3</sup> /h	540-360
Standard air flow H-L	l/s	150-100
External static pressure (factory default)	Pa	30
Static pressure range	Pa	30-120
Dimensions (H x W x D)	mm	275 x 700 x 750
Unit weight	kg	23

### Dimensional Drawings

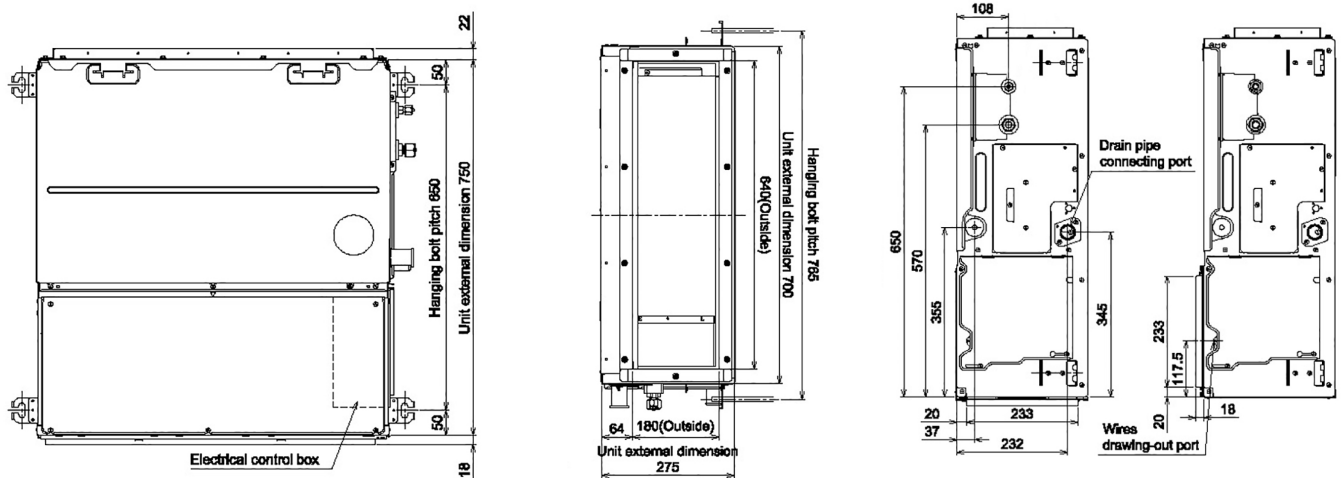

**Cool Designs Ltd**

Raising the Standards in Air Conditioning Distribution

[www.cdlweb.info](http://www.cdlweb.info)

