

Toshiba Air Conditioning - VRF Data Sheet

MMD-AP0096BHP-E Standard ducted

Features


- External static pressure can be raised up to 120 Pa
- Low noise: low fan speed down to 23 dB(A)
- Fresh air intake
- Lift pump up to 850 mm lift
- Ideal for restricted ceiling voids only 275 mm high
- Base or rear return air



Technical Data

Model reference		MMD-AP0096BHP-E
Nominal cooling	kW	2.8
Nominal heating	kW	3.2
Capacity code		1.0
Power input (cool/heat)	kW	0.043
UK cooling	kW	2.69
UK sensible cooling	kW	2.02
UK heating	kW	2.59
Starting current	A	0.50
Running current	A	0.29
Suggested fuse size	A	5
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		2-core screened 1.5 mm
Sound power H-M-L	dB(A)	45-41-38
Sound pressure H-L	dB(A)	30-23
Standard air flow H-L	m ³ /h	570-390
Standard air flow H-L	l/s	158-108
External static pressure (factory default)	Pa	30
Static pressure range	Pa	30-120
Dimensions (H x W x D)	mm	275 x 700 x 750
Unit weight	kg	23

Dimensional Drawings

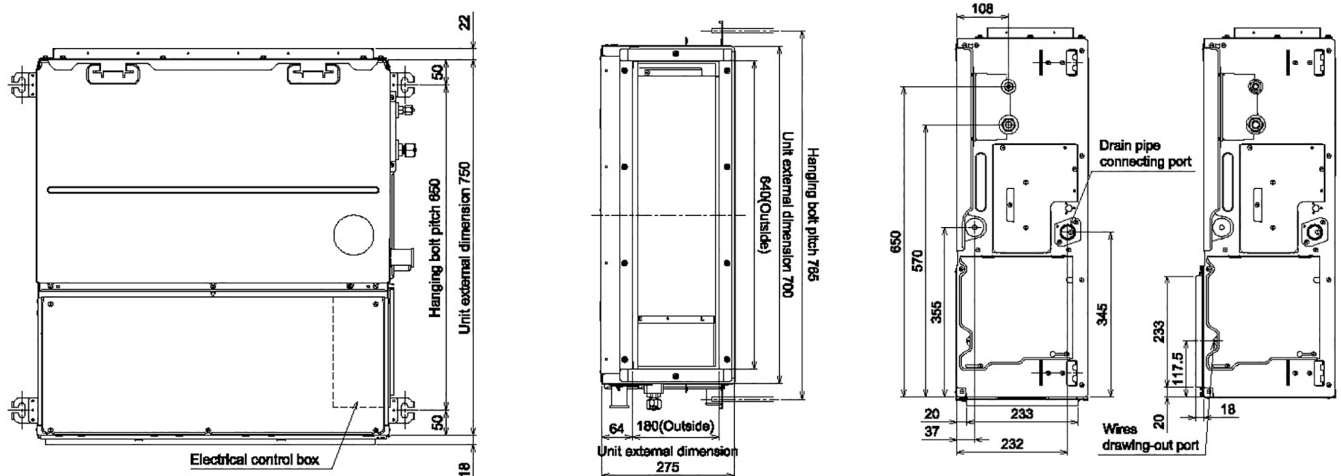

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

