

Toshiba Air Conditioning - VRF Data Sheet

MMD-AP0184H-E High static ducted

Features


- External static pressure can be set to 3 levels (69, 137 and 196 Pa)
- Renewal of indoor ambient air with constant fresh air supply through the field-installed fresh air intake connection
- Inspection hole enables easy access and maintenance



Technical Data

Model reference		MMD-AP0184H-E
Nominal cooling	kW	5.6
Nominal heating	kW	6.3
Capacity code		2.0
Power input (cool/heat)	kW	0.184
UK cooling	kW	5.38
UK sensible cooling	kW	4.04
UK heating	kW	5.10
Starting current	A	1.3
Running current	A	0.81
Suggested fuse size	A	5
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		2-core screened 1.5 mm
Sound power H-M-L	dB(A)	45-52-55
Sound pressure H-L	dB(A)	30-40
Standard air flow	m ³ /h	900
Standard air flow	l/s	250
Air flow limits (lower-upper)	m ³ /h	720-1080
External static pressure (factory default)	Pa	137
Static pressure range	Pa	69-196
Dimensions (H x W x D)	mm	380 x 850 x 660
Unit weight	kg	50

Dimensional Drawings

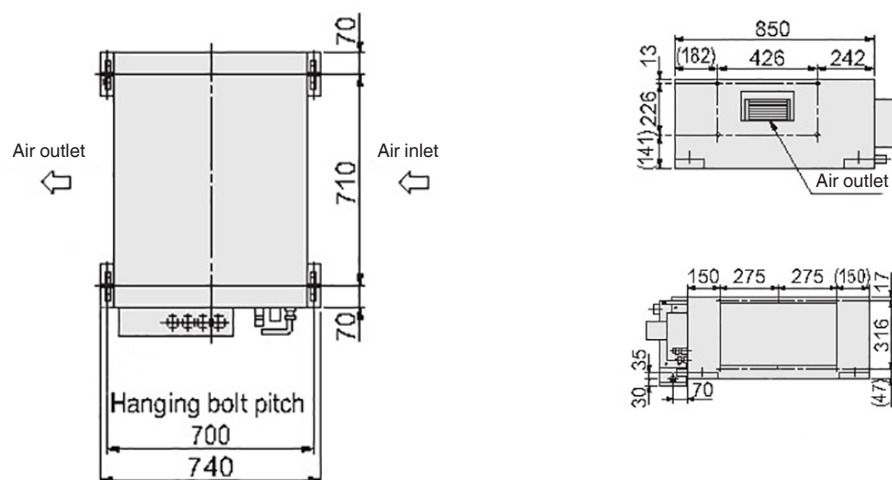

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

