

Toshiba Air Conditioning - VRF Data Sheet

MMD-AP0184SPH-E

Slim ducted

Features


- External static pressure can be raised up to 44 Pa
- Low noise: low fan speed down to 29 dB(A)
- Fresh air intake
- Lift pump up to 550 mm lift
- Ideal for restricted ceiling voids only 210 mm high
- Base or rear return air



Technical Data

Model reference		MMD-AP0184SPH-E
Nominal cooling	kW	5.6
Nominal heating	kW	6.3
Capacity code		2.0
Power input (cool/heat)	kW	0.054
UK cooling	kW	5.38
UK sensible cooling	kW	4.04
UK heating	kW	5.10
Starting current	A	0.68
Running current	A	0.39
Suggested fuse size	A	5
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		2-core screened 1.5 mm
Sound power H-M-L (base/rear air inlet)	dB(A)	55-52-48/48-46-44
Sound pressure H-L (base/rear air inlet)	dB(A)	40-36/33-29
Standard air flow H-L	m³/h	780-580
Standard air flow H-L	l/s	217-161
External static pressure (factory default)	Pa	4
Static pressure range	Pa	4-44 (4 steps)
Dimensions (H x W x D)	mm	210 x 845 x 645
Unit weight	kg	23

Dimensional Drawings

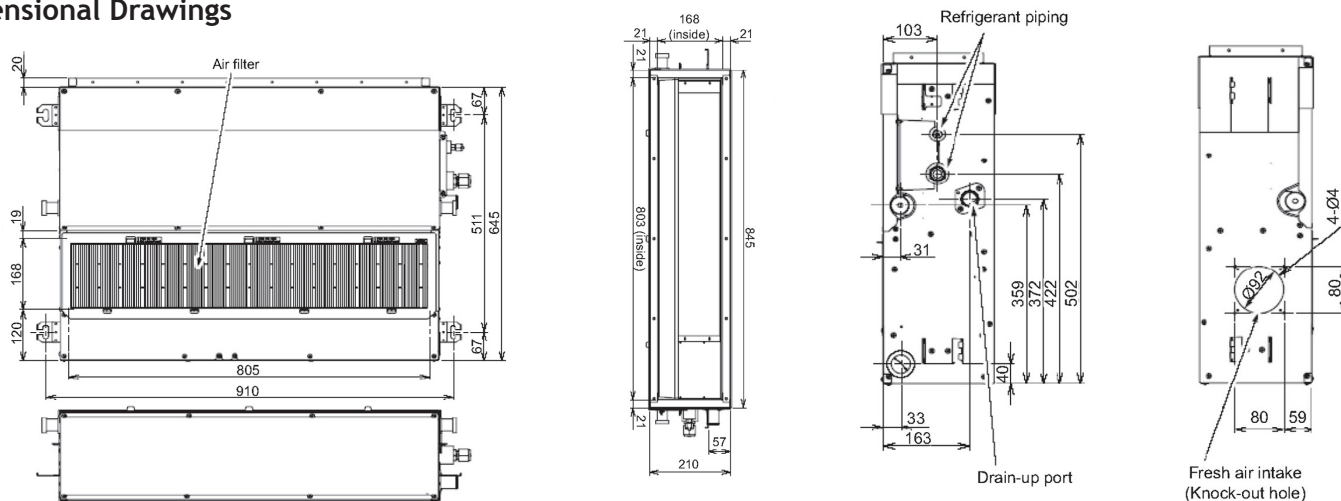

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info



All UK duties are based on Cooling Indoor air temperature 22°C DB/16°C WB Outdoor air temperature 28°C DB 50% RH, high fan speed, 5 m pipe run.
Heating Indoor air temperature 21°C DB Outdoor air temperature -4°C DB 100% RH, high fan speed, 5 m pipe run. Values are based on the maximum compressor output.
Data obtained from Toshiba Air Conditioning Web Data July 2013.