

## Toshiba Air Conditioning - VRF Data Sheet

### MMD-AP0366BHP-E Standard ducted

#### Features


- External static pressure can be raised up to 120 Pa
- Low noise: low fan speed down to 33 dB(A)
- Fresh air intake
- Lift pump up to 850 mm lift
- Ideal for restricted ceiling voids only 275 mm high
- Base or rear return air



#### Technical Data

Model reference		MMD-AP0366BHP-E
Nominal cooling	kW	11.2
Nominal heating	kW	12.5
Capacity code		4.0
Power input (cool/heat)	kW	0.172
UK cooling	kW	10.77
UK sensible cooling	kW	8.07
UK heating	kW	10.13
Starting current	A	1.85
Running current	A	1.07
Suggested fuse size	A	5
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		2-core screened 1.5 mm
Sound power H-M-L	dB(A)	49-47-45
Sound pressure H-L	dB(A)	40-33
Standard air flow H-L	m <sup>3</sup> /h	1920-1140
Standard air flow H-L	l/s	533-317
External static pressure (factory default)	Pa	50
Static pressure range	Pa	30-120
Dimensions (H x W x D)	mm	275 x 1400 x 750
Unit weight	kg	40

#### Dimensional Drawings

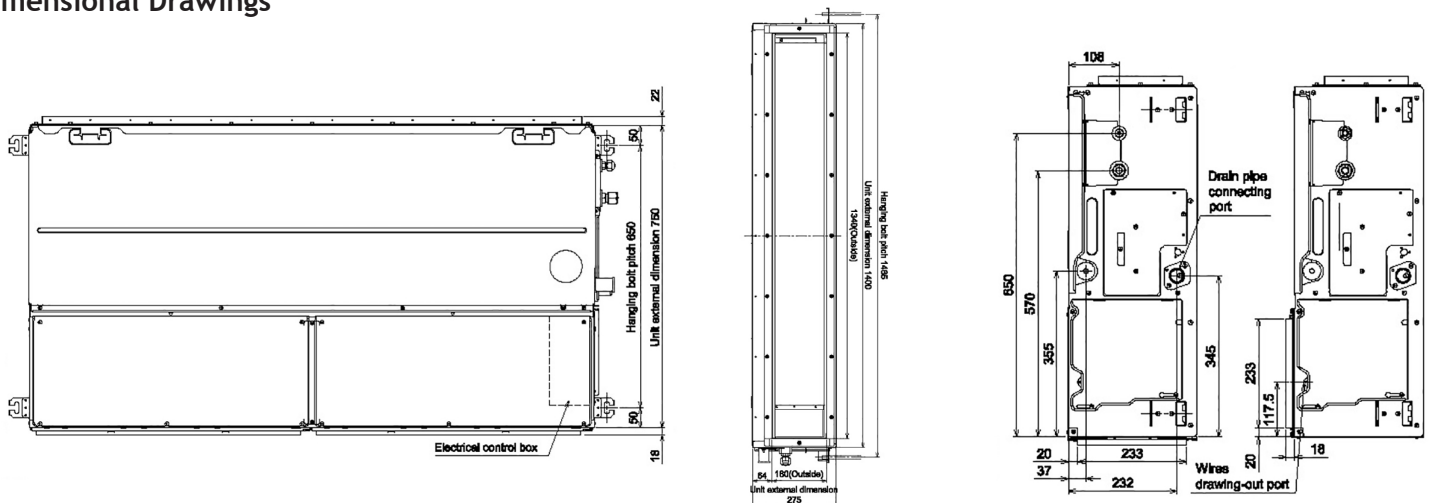

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

