

Toshiba Air Conditioning - VRF Data Sheet

MMD-AP0484H-E High static ducted

Features


- External static pressure can be set to 3 levels (69, 137 and 196 Pa)
- Renewal of indoor ambient air with constant fresh air supply through the field-installed fresh air intake connection
- Inspection hole enables easy access and maintenance



Technical Data

| Model reference | | MMD-AP0484H-E |
|--|-------------------|------------------------|
| Nominal cooling | kW | 14.0 |
| Nominal heating | kW | 16.0 |
| Capacity code | | 5.0 |
| Power input (cool/heat) | kW | 0.414 |
| UK cooling | kW | 13.46 |
| UK sensible cooling | kW | 10.09 |
| UK heating | kW | 12.96 |
| Starting current | A | 4.35 |
| Running current | A | 1.84 |
| Suggested fuse size | A | 10 |
| Power supply | V-ph-Hz | 220/240-1-50 |
| Interconnecting cable | | 2-core screened 1.5 mm |
| Sound power H-M-L | dB(A) | 51-55-59 |
| Sound pressure H-L | dB(A) | 36-44 |
| Standard air flow | m ³ /h | 2100 |
| Standard air flow | l/s | 583 |
| Air flow limits (lower-upper) | m ³ /h | 1680-2520 |
| External static pressure (factory default) | Pa | 137 |
| Static pressure range | Pa | 69-196 |
| Dimensions (H x W x D) | mm | 380 x 1200 x 660 |
| Unit weight | kg | 67 |

Dimensional Drawings

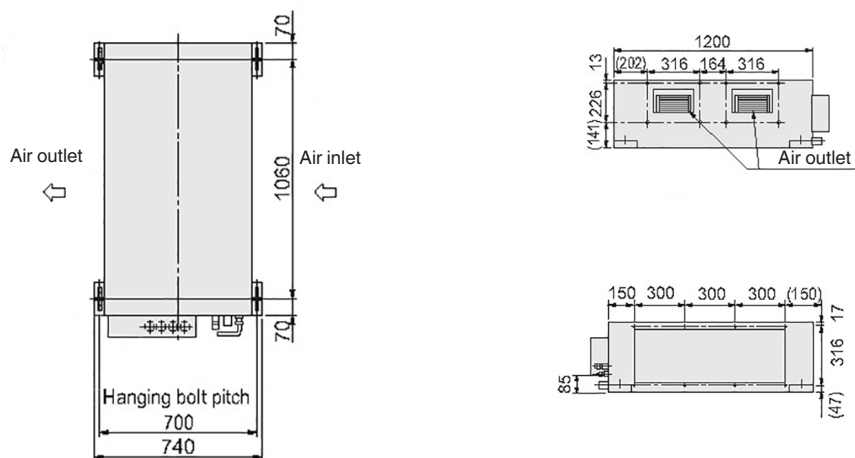

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

