

Toshiba Air Conditioning - VRF Data Sheet

MMD-AP0724H-E High static ducted

Features



- External static pressure can be set to 3 levels (69, 137 and 196 Pa)
- Renewal of indoor ambient air with constant fresh air supply through the field-installed fresh air intake connection
- Inspection hole enables easy access and maintenance



Technical Data

Model reference		MMD-AP0724H-E
Nominal cooling	kW	22.4
Nominal heating	kW	25.0
Capacity code		8.0
Power input (cool/heat)	kW	1.20
UK cooling	kW	21.53
UK sensible cooling	kW	16.15
UK heating	kW	20.25
Starting current	A	13.0
Running current	A	5.25
Suggested fuse size	A	15
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		2-core screened 1.5 mm
Sound power H-M-L	dB(A)	63-64-16
Sound pressure H-L	dB(A)	48-50.5
Standard air flow	m ³ /h	3600
Standard air flow	l/s	1000
Air flow limits (lower-upper)	m ³ /h	2880-4320
External static pressure (factory default)	Pa	137
Static pressure range	Pa	69-196
Dimensions (H x W x D)	mm	470 x 1380 x 1250
Unit weight	kg	150

Dimensional Drawings

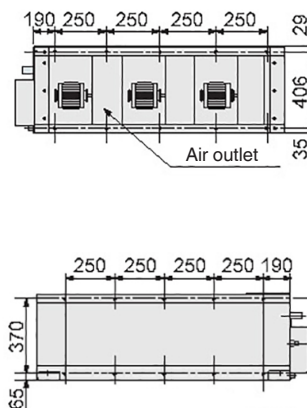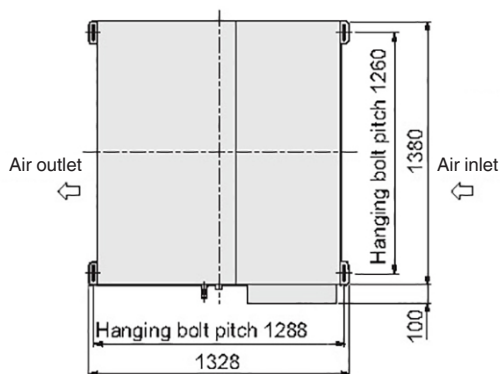

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

