

Toshiba Air Conditioning - VRF Data Sheet

MMD-AP0964H-E High static ducted

Features



- External static pressure can be set to 3 levels (69, 137 and 196 Pa)
- Renewal of indoor ambient air with constant fresh air supply through the field-installed fresh air intake connection
- Inspection hole enables easy access and maintenance



Technical Data

Model reference		MMD-AP0964H-E
Nominal cooling	kW	28.0
Nominal heating	kW	31.5
Capacity code		10.0
Power input (cool/heat)	kW	1.260
UK cooling	kW	26.91
UK sensible cooling	kW	16.15
UK heating	kW	25.52
Starting current	A	13.6
Running current	A	5.52
Suggested fuse size	A	15
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		2-core screened 1.5 mm
Sound power H-M-L	dB(A)	64-65-16
Sound pressure H-L	dB(A)	49-51.5
Standard air flow	m ³ /h	4200
Standard air flow	l/s	1167
Air flow limits (lower-upper)	m ³ /h	3360-5040
External static pressure (factory default)	Pa	137
Static pressure range	Pa	69-196
Dimensions (H x W x D)	mm	470 x 1380 x 1250
Unit weight	kg	150

Dimensional Drawings

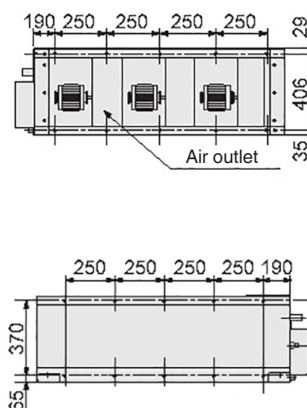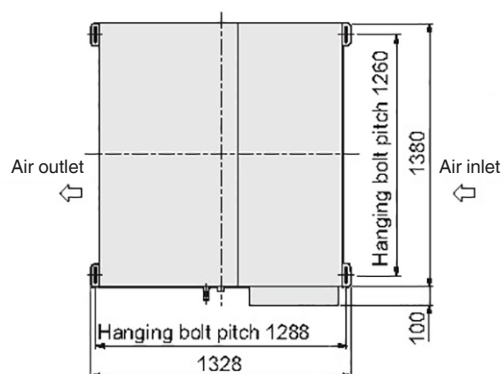

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

