

Toshiba Air Conditioning - VRF Data Sheet

MMD-AP0056SPH-E

Slim ducted

Features


- External static pressure can be raised up to 50 Pa
- Low noise: low fan speed down to 24 dB(A)
- Fresh air intake
- Lift pump up to 550 mm lift
- Ideal for restricted ceiling voids only 210 mm high
- Base or rear return air
- This model can only be used with the new e-series VRF outdoor units



Technical Data

Model reference		MMD-AP0056SPH-E
Nominal cooling	kW	1.7
Nominal heating	kW	1.9
Capacity code		0.6
UK cooling	kW	1.5
UK sensible cooling	kW	1.3
UK heating	kW	1.3
Starting current	A	0.51
Running current	A	0.29
Suggested fuse size	A	5
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		2-core screened 1.5 mm
Sound power H-M-L (base/rear air inlet)	dB(A)	42-41-39/50-48-45
Sound pressure H-M-L (base/rear air inlet)	dB(A)	35-33-30/27-26-24
Standard air flow H-L	m³/h	490-400
Standard air flow H-L	l/s	137-112
External static pressure (factory default)	Pa	6
Static pressure range	Pa	10-50 (4 steps)
Dimensions (H x W x D)	mm	210 x 845 x 645
Unit weight	kg	22

Dimensional Drawings

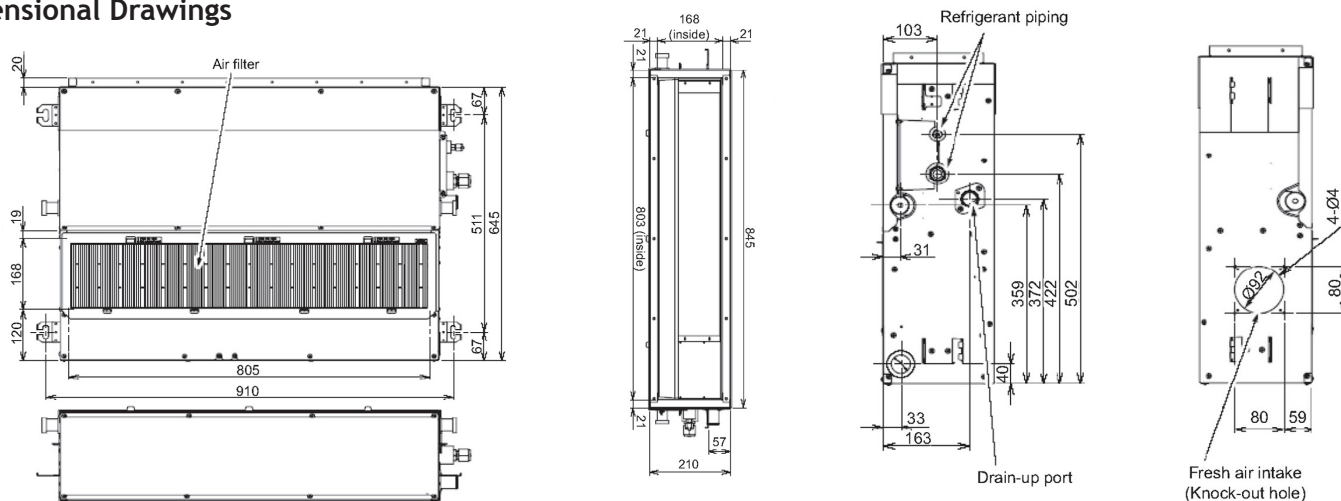

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info



All UK duties are based on Cooling Indoor air temperature 22°C DB/16°C WB Outdoor air temperature 28°C DB 50% RH, high fan speed, 5 m pipe run.
Heating Indoor air temperature 21°C DB Outdoor air temperature -4°C DB 100% RH, high fan speed, 5 m pipe run. Values are based on the maximum compressor output.
Data obtained from Toshiba Air Conditioning Web Data July 2013.