

Toshiba Air Conditioning - VRF Data Sheet

MML-AP0074NH-E Bi-Flow console

Features



- Compact and modern design (600 x 700 x 220 mm)
- Toshiba IAQ filter system, with powerful anti-virus, anti-bacteria and deodorizing effect
- Bi-Flow. Two outlets for complete personalized flow: flow intensity and air direction control
- Wireless remote control with pre-set function and unique hi-power button



Technical Data

Model reference		MML-AP0074NH-E
Nominal cooling	kW	2.2
Nominal heating	kW	2.5
Capacity code		0.8
Power input (cool/heat)	kW	0.021
UK cooling	kW	2.11
UK sensible cooling	kW	1.59
UK heating	kW	2.03
Starting current	A	0.26
Running current	A	0.20
Suggested fuse size	A	5
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		2-core screened 1.5 mm
Sound power H-M-L	dB(A)	53-47-41
Sound pressure H-L	dB(A)	38-26
Air flow H-L	m ³ /h	510-282
Air flow H-L	l/s	142-78
Dimensions (H x W x D)	mm	600 x 700 x 220
Unit weight	kg	17

Dimensional Drawings

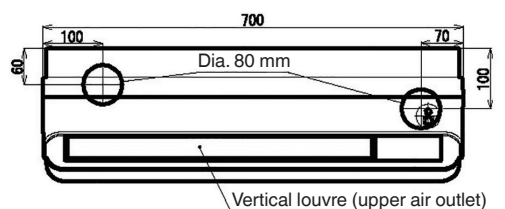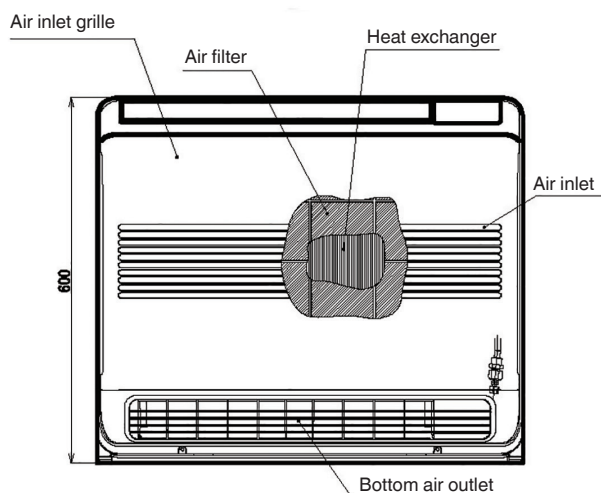

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info



All UK duties are based on Cooling Indoor air temperature 22°C DB/16°C WB Outdoor air temperature 28°C DB 50% RH, high fan speed, 5 m pipe run.
Heating Indoor air temperature 21°C DB Outdoor air temperature -4°C DB 100% RH, high fan speed, 5 m pipe run. Values are based on the maximum compressor output.
Data obtained from Toshiba Air Conditioning Web Data July 2013.