TOSHIBA Leading Innovation >>>

Toshiba Air Conditioning - VRF Data Sheet

MML-AP0124H-E Floor-mounted console

Features


- Vertical or horizontal air discharge
- Built-in facility for standard remote controller
- Variable installation options, service access at top, rear, left or right side of unit
- Minimum space required for installation and servicing



Technical Data

Model reference		MML-AP0124H-E
Nominal cooling	kW	3.6
Nominal heating	kW	4.0
Capacity code		1.25
Power input (cool/heat)	kW	0.092
UK cooling	kW	3.46
UK sensible cooling	kW	2.60
UK heating	kW	3.24
Starting current	A	0.80
Running current	A	0.43
Suggested fuse size	A	5
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		2-core screened 1.5 mm
Sound power H-M-L	dB(A)	60-56-53
Sound pressure H-L	dB(A)	45-38
Air flow H-L	m³/h	900-650
Air flow H-L	l/s	250-17
Dimensions (H x W x D)	mm	630 x 950 x 230
Unit weight	kg	37

Dimensional Drawings

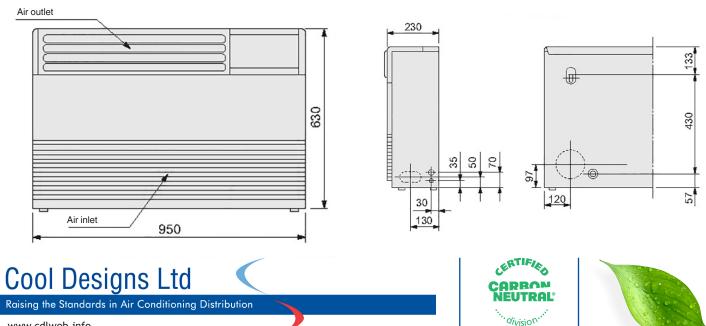

www.cdlweb.info

All UK duties are based on Cooling Indoor air temperature 22°C DB/16°C WB Outdoor air temperature 28°C DB 50% RH, high fan speed, 5 m pipe run. Heating Indoor air temperature 21°C DB Outdoor air temperature -4°C DB 100% RH, high fan speed, 5 m pipe run. Values are based on the maximum compressor output. Data obtained from Toshiba Air Conditioning Web Data July 2013.

CarbonNeutral.com