

## Toshiba Air Conditioning - VRF Data Sheet

### MML-AP0184NH-E Bi-Flow console

#### Features


- Compact and modern design (600 x 700 x 220 mm)
- Toshiba IAQ filter system, with powerful anti-virus, anti-bacteria and deodorizing effect
- Bi-Flow. Two outlets for complete personalized flow: flow intensity and air direction control
- Wireless remote control with pre-set function and unique hi-power button



#### Technical Data

Model reference		MML-AP0184NH-E
Nominal cooling	kW	5.6
Nominal heating	kW	6.3
Capacity code		2.0
Power input (cool/heat)	kW	0.052
UK cooling	kW	5.38
UK sensible cooling	kW	4.04
UK heating	kW	5.10
Starting current	A	0.55
Running current	A	0.42
Suggested fuse size	A	5
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		2-core screened 1.5 mm
Sound power H-M-L	dB(A)	62-55-49
Sound pressure H-L	dB(A)	47-34
Air flow H-L	m <sup>3</sup> /h	726-426
Air flow H-L	l/s	202-118
Dimensions (H x W x D)	mm	600 x 700 x 220
Unit weight	kg	17

#### Dimensional Drawings

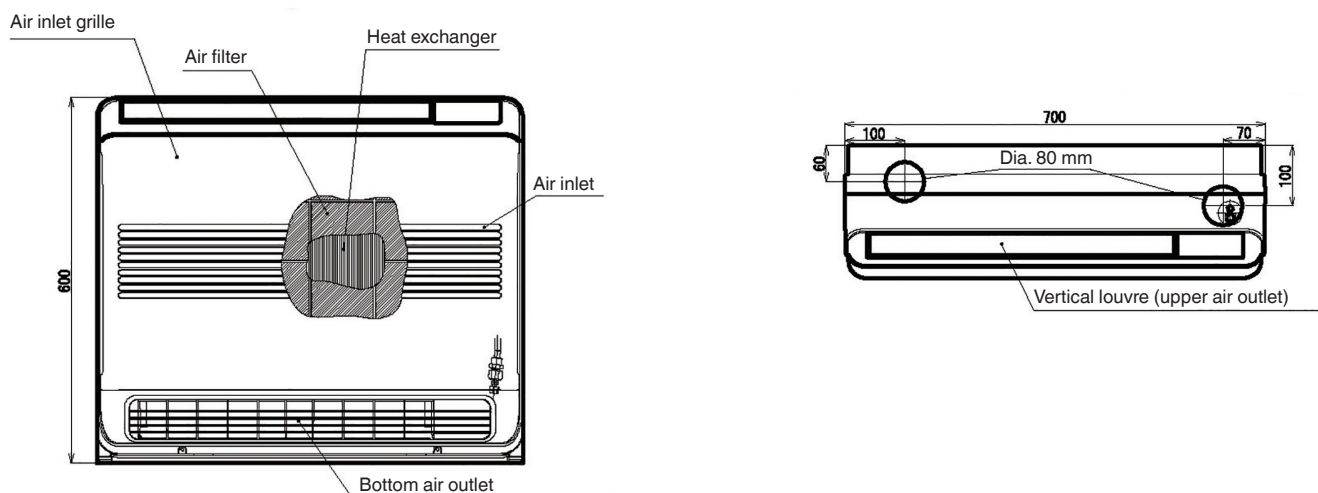

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

[www.cdlweb.info](http://www.cdlweb.info)

