TOSHIBA Leading Innovation >>>

Toshiba Air Conditioning - VRF Data Sheet

MMU-AP0124YH-E

1-way cassette


Features


- Compact size (235 x 850 x 400 mm, 2.2 to 3.6 kW)
- Low noise down to 34 dB(A) (2.2 to 3.6 kW)
- Fresh air intake
- Lift pump up to 350 mm lift
- Ideal for restricted ceiling voids

Technical Data

| Model reference | | MMU-AP0124YH-E |
|--|---------|------------------------|
| Nominal cooling | kW | 3.6 |
| Nominal heating | kW | 4.0 |
| Capacity code | | 1.25 |
| Power input (cool/heat) | kW | 0.053 |
| UK cooling | kW | 3.46 |
| UK sensible cooling | kW | 2.6 |
| UK heating | kW | 3.24 |
| Starting current | A | 0.60 |
| Running current | A | 0.24 |
| Suggested fuse size | A | 5 |
| Power supply | V-ph-Hz | 220/240-1-50 |
| Interconnecting cable | | 2-core screened 1.5 mm |
| Sound power H-M-L | dB(A) | 57-54-49 |
| Sound pressure H-L | dB(A) | 42-34 |
| Air flow H-L | m³/h | 540-420 |
| Air flow H-L | l/s | 150-117 |
| Dimensions (H x W x D) | mm | 235 x 850 x 400 |
| Unit weight | kg | 22 |
| Panel reference | | RBC-UY136PG |
| Panel dimensions $(H \times W \times D)$ | mm | 18 x 1050 x 470 |
| | | |

Dimensional Drawings

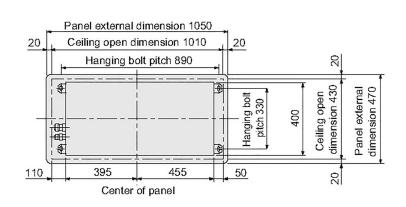



Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info



All UK duties are based on Cooling Indoor air temperature 22°C DB/16°C WB Outdoor air temperature 28°C DB 50% RH, high fan speed, 5 m pipe run. Heating Indoor air temperature 21°C DB Outdoor air temperature -4°C DB 100% RH, high fan speed, 5 m pipe run. Values are based on the maximum compressor output. Data obtained from Toshiba Air Conditioning Web Data July 2013.

