

Toshiba Air Conditioning - VRF Data Sheet

MMU-AP0124HP-E 4-way cassette

Features



- Individual louvre control
- Self-cleaning operation
- Auxiliary fresh air intake
- Lift pump up to 850 mm lift
- Removable corner "Pockets" for easy installation
- Long life pre-filter



Technical Data

Model reference		MMU-AP0124HP-E
Nominal cooling	kW	3.6
Nominal heating	kW	4.0
Capacity code		1.25
Power input (cool/heat)	kW	0.021
UK cooling	kW	3.39
UK sensible cooling	kW	2.6
UK heating	kW	3.24
Starting current	A	0.30
Running current	A	0.23
Suggested fuse size	A	5
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		2-core screened 1.5 mm
Sound power H-M-L	dB(A)	45-44-45
Sound pressure H-L	dB(A)	30-27
Air flow H-L	m ³ /h	800-680
Air flow H-L	l/s	222-188
Dimensions (H x W x D)	mm	256 x 840 x 840
Unit weight	kg	20
Panel reference		RBC-U31PG(W)-E
Panel dimensions (H x W x D)	mm	30 x 950 x 950

Dimensional Drawings

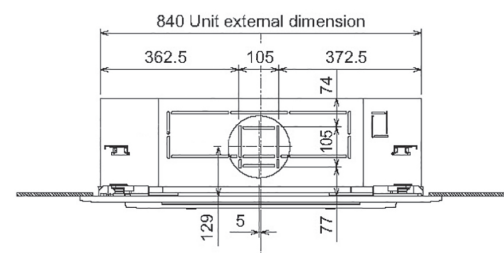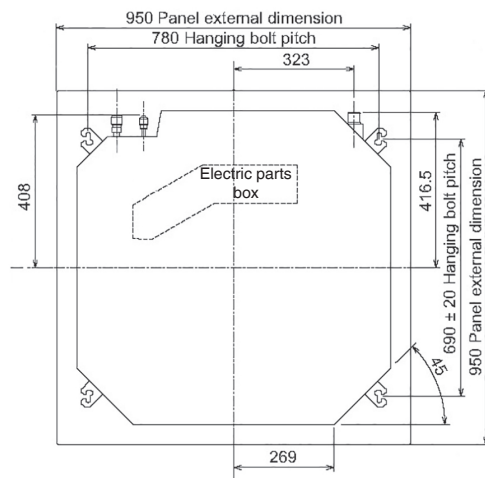

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

