

Toshiba Air Conditioning - VRF Data Sheet

MMU-AP0244HP-E 4-way cassette

Features



- Individual louvre control
- Self-cleaning operation
- Auxiliary fresh air intake
- Lift pump up to 850 mm lift
- Removable corner "Pockets" for easy installation
- Long life pre-filter



Technical Data

Model reference		MMU-AP0244HP-E
Nominal cooling	kW	7.1
Nominal heating	kW	8.0
Capacity code		2.5
Power input (cool/heat)	kW	0.036
UK cooling	kW	6.69
UK sensible cooling	kW	5.12
UK heating	kW	6.48
Starting current	A	0.42
Running current	A	0.38
Suggested fuse size	A	5
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		2-core screened 1.5 mm
Sound power H-M-L	dB(A)	50-46-43
Sound pressure H-L	dB(A)	35-28
Air flow H-L	m ³ /h	1290-800
Air flow H-L	l/s	358-222
Dimensions (H x W x D)	mm	256 x 840 x 840
Unit weight	kg	20
Panel reference		RBC-U31PG(W)-E
Panel dimensions (H x W x D)	mm	30 x 950 x 950

Dimensional Drawings

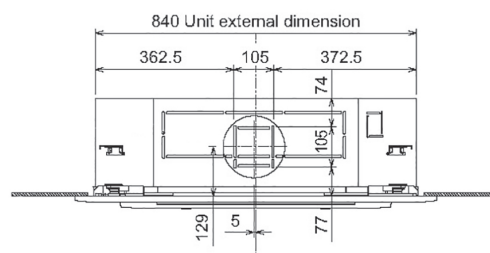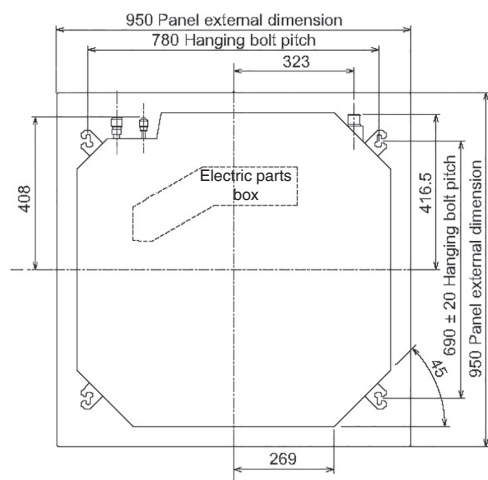

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

