

Toshiba Air Conditioning - VRF Data Sheet

MMU-AP0304HP-E 4-way cassette

Features



- Individual louvre control
- Self-cleaning operation
- Auxiliary fresh air intake
- Lift pump up to 850 mm lift
- Removable corner "Pockets" for easy installation
- Long life pre-filter



Technical Data

Model reference		MMU-AP0304HP-E
Nominal cooling	kW	9.0
Nominal heating	kW	10.0
Capacity code		3.2
Power input (cool/heat)	kW	0.043
UK cooling	kW	8.48
UK sensible cooling	kW	6.49
UK heating	kW	8.1
Starting current	A	0.59
Running current	A	0.43
Suggested fuse size	A	5
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		2-core screened 1.5 mm
Sound power H-M-L	dB(A)	53-48-45
Sound pressure H-L	dB(A)	38-30
Air flow H-L	m ³ /h	1320-850
Air flow H-L	l/s	367-237
Dimensions (H x W x D)	mm	256 x 840 x 840
Unit weight	kg	20
Panel reference		RBC-U31PG(W)-E
Panel dimensions (H x W x D)	mm	30 x 950 x 950

Dimensional Drawings

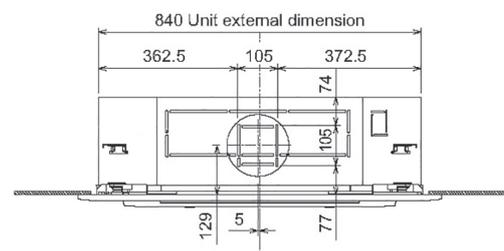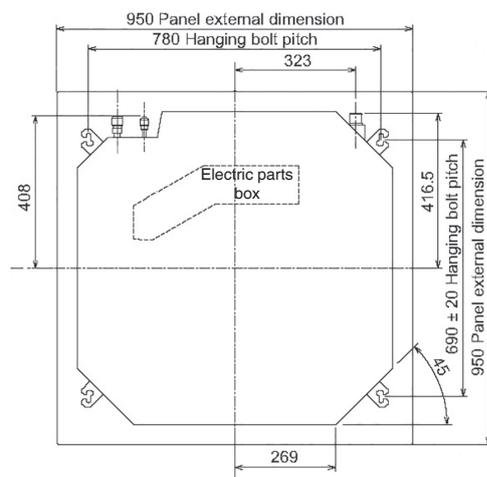

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

