

## Toshiba Air Conditioning - VRF Data Sheet

### MMU-AP0484HP-E 4-way cassette

#### Features



- Individual louvre control
- Self-cleaning operation
- Auxiliary fresh air intake
- Lift pump up to 850 mm lift
- Removable corner "Pockets" for easy installation
- Long life pre-filter



#### Technical Data

Model reference		MMU-AP0484HP-E
Nominal cooling	kW	14.0
Nominal heating	kW	16.0
Capacity code		5.0
Power input (cool/heat)	kW	0.112
UK cooling	kW	13.19
UK sensible cooling	kW	10.09
UK heating	kW	12.96
Starting current	A	1.23
Running current	A	0.88
Suggested fuse size	A	5
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		2-core screened 1.5 mm
Sound power H-M-L	dB(A)	61-53-48
Sound pressure H-L	dB(A)	46-33
Air flow H-L	m <sup>3</sup> /h	2130-1130
Air flow H-L	l/s	592-313
Dimensions (H x W x D)	mm	319 x 840 x 840
Unit weight	kg	25
Panel reference		RBC-U31PG(W)-E
Panel dimensions (H x W x D)	mm	30 x 950 x 950

#### Dimensional Drawings

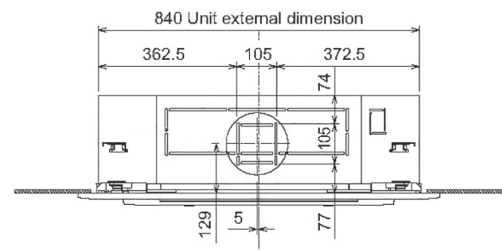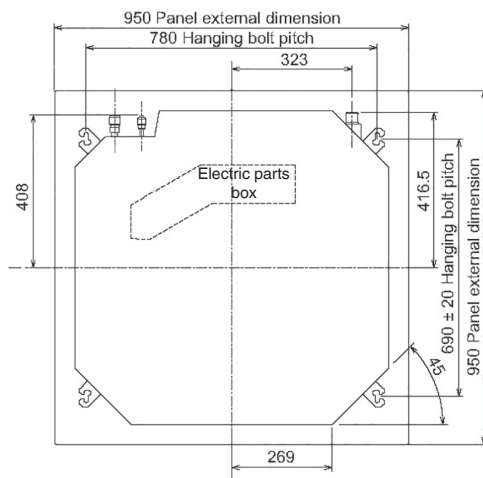

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

