



CIAT - MAMBO Console air conditioner

MAMBO Console 18HV Console air conditioner

Features

- Infra-red controller as standard (wired available).
- Full Wi-Fi compatibility.
- Optional 'follow me' function.
- Compact design.
- Optimised air distribution.
- Stylish and lightweight.




Technical Data

Model reference			MAMBO - Console 18HV
Indoor unit			42HC18VSC
Outdoor unit			38HU18VSC
Cooling capacity	Min./nom./max.	kW	2.00/4.40/4.60
Heating capacity*	Min./nom./max.	kW	2.00/5.40/5.50
	@ -7 °C	kW	3.30
	@ -10 °C	kW	3.30
	@ -15 °C	kW	2.20
SEER		W/W	6.1
SCOP	Warmer/average	W/W	4.0/5.3
Energy label	SEER		A++
	SCOP warmer/average		A+/A+++
Rated current		A	11
Rated input		kW	2.53
Power supply		V/ph/Hz	220-240/1/50
Power to			Outdoor
Interconnecting			5
Refrigerant amount	R410A	kg	1.70
Liquid side - gas side		inch	1/4 - 1/2
Standard piping length	Min./max. piping length	m	3/30
	Max. height difference	m	20
	Additional charge	g/m	15
Indoor unit			42HC18VSC
Sound power level**		dB(A)	60
Sound pressure level**	High/med./low	dB(A)	46/44/42
Air flow	High/med./low	m³/h	530/470/430
Weight		kg	15.0/19.5
Dimension	W x D x H	mm	700 x 600 x 210

* -7 °C/-10 °C/-15 °C heating at free frequency

** Sound data in cooling mode

Dimensional Drawings

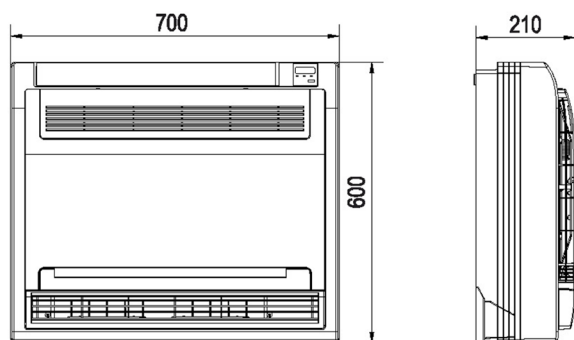

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info





CIAT - MAMBO Console air conditioner



MAMBO Console 18HV Console air conditioner



Outdoor unit			38HU18VSC
Sound power level**		dB(A)	65
Sound pressure level**		dB(A)	57
Air flow		m ³ /h	2100
Weight		kg	38.0/40.5
Dimension	W x D x H	mm	800 x 333 x 554

** Sound data in cooling mode

Dimensional Drawings

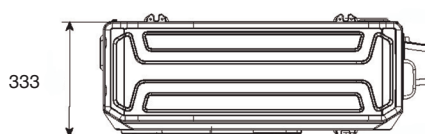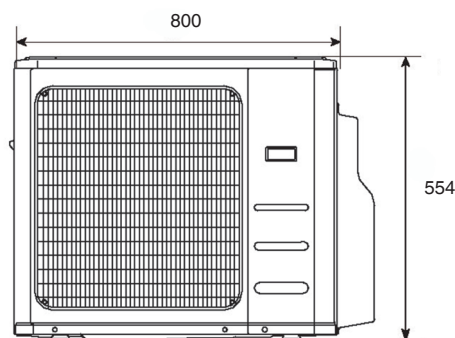

Accessories	
Description	Part Number
Wired remote control for LC range - KJR-12- G2	7511630
Centralised wired remote control for LC range connectable up to 64 units - CCM-30	7511631

Split-system unit ratings are based on the following conditions:

Cooling capacities: Indoor air temperature 27°C (DB)/19°C (WB) - Outdoor air temperature 35°C (DB)/24°C (WB)

Heating capacities: Indoor air temperature 20°C (DB)/15°C (WB) - Outdoor air temperature 7°C (DB)/6°C (WB)

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

