

Toshiba Air Conditioning - RAV-SM Data Sheet

RAV-SM304SDT-E Slim Ducted

Features


- External static pressure can be raised up to 50 Pa
- Low noise: low fan speed down to 26 dB(A)
- Fresh air intake
- Natural drain port and lift pump (up to 850 mm lift)
- Ideal for restricted ceiling voids only 210 mm high
- Base or rear return air



Technical Data

Model reference		RAV-SM304SDT-E
Nominal cooling	kW	2.5
Nominal heating	kW	3.4
Annual power consumption	kWh	430
UK cooling	kW	2.35
UK sensible cooling	kW	1.95
UK heating	kW	2.18
Starting current	A	1
Running current	A	8.5
Suggested fuse size	A	10
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		3 core + earth
Sound power (high/low) - base/rear	dB(A)	54/48
Sound pressure (high/low) - base/rear	dB(A)	39/33
Air flow (high/low)	m ³ /h	660/480
Air flow (high/low)	l/s	183/133
Dimensions (H x W x D)	mm	210 x 845 x 645
Unit weight	kg	22
Energy label (cool/heat)	V-ph-Hz	A++/A+
EER/COP		4.46/3.95
SEER/SCOP		6.10/4.48
Pipe sizes (liquid-suction)	inch	1/4-3/8
External static pressure range	Pa	10-50

Dimensional Drawings

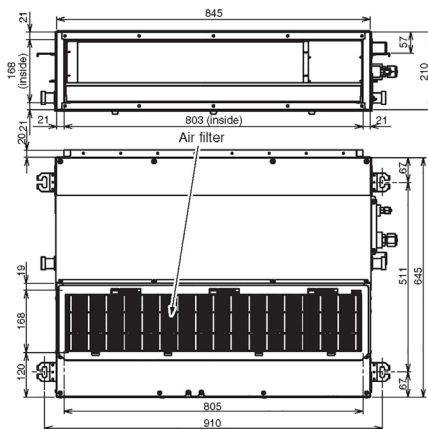

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

