TOSHIBA Leading Innovation >>>

Toshiba Air Conditioning - VRF Data Sheet

RBM-Y1124FE **4** Series Flow Selector Box


Features

- Compact size, 180 x 425 x 300 mm
- Lightweight 11 kg
- Up to 6 indoor units from one Flow Selector Box
- Increased piping length to indoor unit (50 m)
- For use with SHRMe condensing units

Technical Data

| Model reference | | RBM-Y1124FE |
|---|---------|-----------------|
| Power supply | V-ph-Hz | 220/240-1-50 |
| Connectable indoor capacity | HP | Below 4.0 |
| Connectable indoor units | Qty | 6 |
| Dimensions (H x W x D) | mm | 180 x 425 x 300 |
| Unit weight | kg | 11 |
| Connection port diameter (indoor side) | | Braze |
| Liquid pipe | inch | 3/8 |
| Suction pipe | inch | 5/8 |
| Connection port diameter (outdoor side) | | Braze |
| Liquid pipe | inch | 3/8 |
| Discharge pipe | inch | 1/2 |
| Suction pipe | inch | 5/8 |
| Interconnecting cable (supplied) | | |
| Power cable | | 3 core |
| Communication cable | | 5 core |

Dimensional Drawings

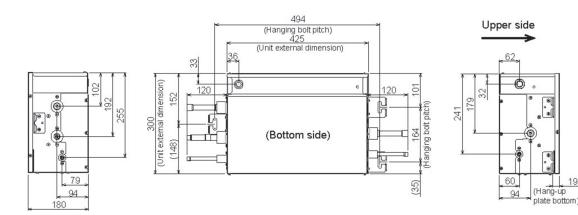



Raising the Standards in Air Conditioning Distribution

www.cdlweb.info



19

All UK duties are based on Cooling Indoor air temperature 22°C DB/16°C WB Outdoor air temperature 28°C DB 50% RH, high fan speed, 5 m pipe run. Heating Indoor air temperature 21°C DB Outdoor air temperature -4°C DB 100% RH, high fan speed, 5 m pipe run. Values are based on the maximum compressor output. Data obtained from Toshiba Air Conditioning Web Data July 2013.