TOSHIBA Leading Innovation >>>

Toshiba Air Conditioning - VRF Data Sheet

RBM-Y2804FE 4 Series Flow Selector Box


Features

- Compact size, 180 x 495 x 350 mm
- Lightweight 16 kg
- Up to 16 indoor units from one Flow Selector Box
- Increased piping length to indoor unit (50 m)
- For use with SHRMe condensing units

Technical Data

Model reference		RBM-Y2804FE
Power supply	V-ph-Hz	220/240-1-50
Connectable indoor capacity	HP	6.4 to below 10.0
Connectable indoor units	Qty	16
Dimensions (H x W x D)	mm	180 x 495 x 350
Unit weight	kg	16
Connection port diameter (indoor side)		Braze
Liquid pipe	inch	1/2
Suction pipe	inch	7/8
Connection port diameter (outdoor side)		Braze
Liquid pipe	inch	1/2
Discharge pipe	inch	3/4
Suction pipe	inch	7/8
Interconnecting cable (supplied)		
Power cable		3 core
Communication cable		5 core

Dimensional Drawings

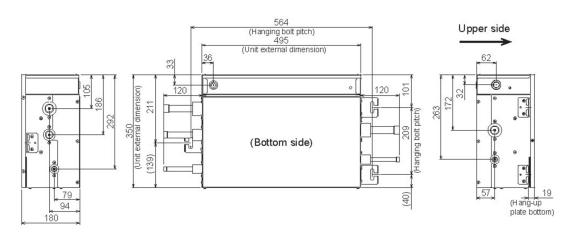



Raising the Standards in Air Conditioning Distribution

www.cdlweb.info



All UK duties are based on Cooling Indoor air temperature 22°C DB/16°C WB Outdoor air temperature 28°C DB 50% RH, high fan speed, 5 m pipe run. Heating Indoor air temperature 21°C DB Outdoor air temperature -4°C DB 100% RH, high fan speed, 5 m pipe run. Values are based on the maximum compressor output. Data obtained from Toshiba Air Conditioning Web Data July 2013.