

Toshiba Air Conditioning - RAV-RM Data Sheet

RAV-RM1101CTP-E Ceiling-suspended

Features


- Redesigned for use with refrigerant R32
- The best solution when no ceiling void is available
- Self-cleaning
- Air flow angle is automatically set to the most suitable setting, according to requirements



Technical Data

Model reference			RAV-RM1101CTP-E
Nominal	Cooling Capacity	kW	9.5
	Heating Capacity	kW	11.2
	EER/COP	W/W	3.22/3.81
UK	Cooling Total/Sensible	kW	9.10/7.18
	Heating	kW	8.01
Cooling EN14825	Range Min. - Max.	kW	3.0 - 11.2
	Power Input	kW	2.95
	Pdesign	kW	9.5
	SEER/Energy Efficiency Class		5.86/A+
	Seasonal Energy Consumption	kWh/a	604
Heating EN14825	Range Min. - Max.	kW	3.0 - 13.0
	Power Input	kW	2.94
	Pdesign	kW	7.60
	SCOP/Energy Efficiency Class		4.27/A+
	Seasonal Energy Consumption	kWh/a	2489
Air Flow	High - Medium - Low	l/s	517 - 375 - 283
	High - Medium - Low	m ³ /h	1860 - 1350 - 1020
Sound	Pressure High - Medium - Low	dB(A)	44 - 38 - 32
	Power High - Medium - Low	dB(A)	59 - 53 - 47
Unit	Height x Width x Depth	mm	235 x 1586 x 690
	Weight	kg	37
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 - 3/8
	Drain Pipe Connection Upper - Lower	mm	VP26/20
Remote Controller			RBC-AMT32E
Power Cable	Outdoor to Indoor		3 core + earth

Dimensional Drawings

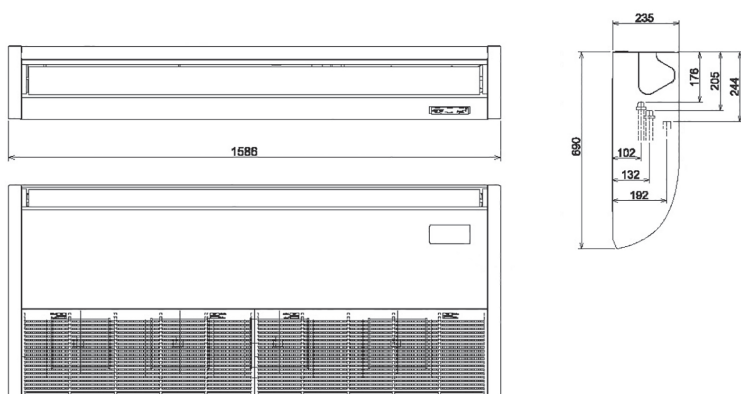

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

