

Toshiba Air Conditioning - RAV-RM Data Sheet

RAV-RM1401CTP-E Ceiling-suspended

Features


- Redesigned for use with refrigerant R32
- The best solution when no ceiling void is available
- Self-cleaning
- Air flow angle is automatically set to the most suitable setting, according to requirements



Technical Data

Model reference		RAV-RM1401CTP-E	
Nominal	Cooling Capacity	kW	12.1
	Heating Capacity	kW	12.8
	EER/COP	W/W	2.74/3.74
UK	Cooling Total/Sensible	kW	11.50/8.40
	Heating	kW	9.30
Cooling EN14825	Range Min. - Max.	kW	3.0 - 13.2
	Power Input	kW	4.67
	Pdesign	kW	12.0
	SEER/Energy Efficiency Class		5.36/A
	Seasonal Energy Consumption	kWh/a	-
Heating EN14825	Range Min. - Max.	kW	3.0 - 16.0
	Power Input	kW	3.48
	Pdesign	kW	8.0
	SCOP/Energy Efficiency Class		4.19/A+
	Seasonal Energy Consumption	kWh/a	-
Air Flow	High - Medium - Low	l/s	567 - 425 - 333
	High - Medium - Low	m ³ /h	2040 - 1530 - 1200
Sound	Pressure High - Medium - Low	dB(A)	46 - 41 - 35
	Power High - Medium - Low	dB(A)	61 - 56 - 50
Unit	Height x Width x Depth	mm	235 x 1586 x 690
	Weight	kg	37
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 - 3/8
	Drain Pipe Connection Upper - Lower	mm	VP26/20
Remote Controller			RBC-AMT32E
Power Cable	Outdoor to Indoor		3 core + earth

Dimensional Drawings

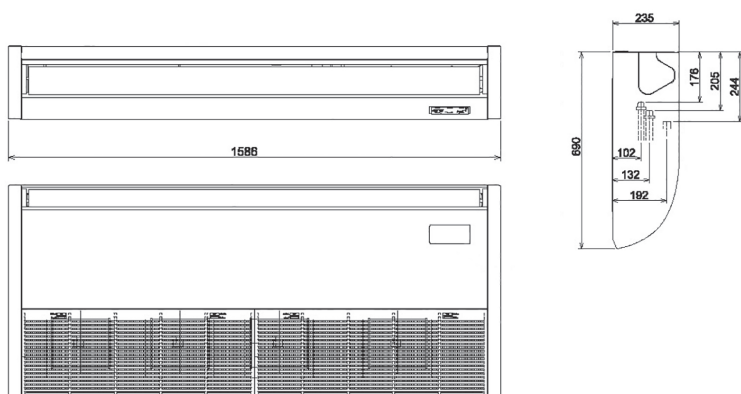

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

