

Toshiba Air Conditioning - RAV-RM Data Sheet

RAV-RM401CTP-E Ceiling-suspended

Features




- Redesigned for use with refrigerant R32
- The best solution when no ceiling void is available
- Self-cleaning
- Air flow angle is automatically set to the most suitable setting, according to requirements



Technical Data

| Model reference | | | RAV-RM401CTP-E |
|-------------------|-------------------------------------|-------------------|-----------------|
| Nominal | Cooling Capacity | kW | 3.6 |
| | Heating Capacity | kW | 4.0 |
| | EER/COP | W/W | 4.34/5.13 |
| UK | Cooling Total/Sensible | kW | 3.45/2.89 |
| | Heating | kW | 2.56 |
| Cooling EN14825 | Range Min. - Max. | kW | 0.9 - 4.0 |
| | Power Input | kW | 0.83 |
| | Pdesign | kW | 3.6 |
| | SEER/Energy Efficiency Class | | 6.34/A++ |
| | Seasonal Energy Consumption | kWh/a | 211 |
| Heating EN14825 | Range Min. - Max. | kW | 0.8 - 5.0 |
| | Power Input | kW | 0.78 |
| | Pdesign | kW | 2.70 |
| | SCOP/Energy Efficiency Class | | 5.1/A+++ |
| | Seasonal Energy Consumption | kWh/a | 1125 |
| Air Flow | High - Medium - Low | l/s | 250 - 200 - 150 |
| | High - Medium - Low | m ³ /h | 900 - 720 - 540 |
| Sound | Pressure High - Medium - Low | dB(A) | 37 - 35 - 28 |
| | Power High - Medium - Low | dB(A) | 52 - 50 - 43 |
| Unit | Height x Width x Depth | mm | 235 x 950 x 690 |
| | Weight | kg | 23 |
| Pipe Connection | Flare Connections (gas - liquid) | inch | 1/2 - 1/4 |
| | Drain Pipe Connection Upper - Lower | mm | VP26/20 |
| Remote Controller | | | RBC-AMT32E |
| Power Cable | Outdoor to Indoor | | 3 core + earth |

Dimensional Drawings

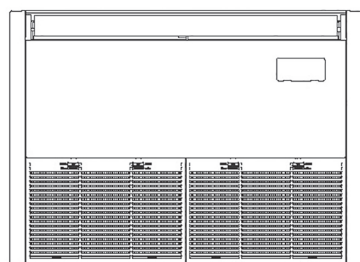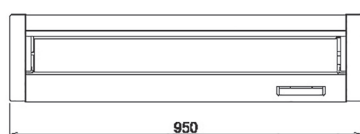

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

