


Toshiba Air Conditioning - RAV-RM Data Sheet

RAV-RM401MUT-E Compact 4-Way Cassette

Features




- New elegant flat panel design
- Perfect grid ceiling fitment
- Compact thin chassis
- Individual louvre control
- 5-step air flow control

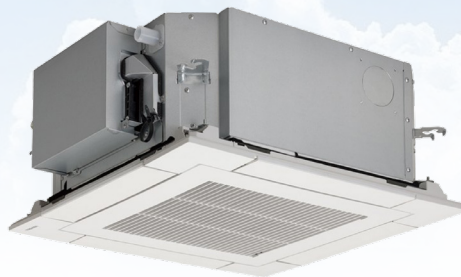

Technical Data

| Model reference | | RAV-RM401MUT-E | |
|-------------------|----------------------------------|-------------------|-----------------|
| Nominal | Cooling Capacity | kW | 3.6 |
| | Heating Capacity | kW | 4.0 |
| | EER/COP | W/W | 4/4.21 |
| UK | Cooling Total/Sensible | kW | 3.45/2.79 |
| | Heating | kW | 2.56 |
| Cooling EN14825 | Range Min. - Max. | kW | 0.9 - 4.0 |
| | Power Input | kW | 0.9 |
| | Pdesign | kW | 3.6 |
| | SEER/Energy Efficiency Class | | 5.76/A+ |
| | Seasonal Energy Consumption | kWh/a | 235 |
| Heating EN14825 | Range Min. - Max. | kW | 0.8 - 5.0 |
| | Power Input | kW | 0.95 |
| | Pdesign | kW | 2.7 |
| | SCOP/Energy Efficiency Class | | 4.44/A+ |
| | Seasonal Energy Consumption | kWh/a | 1032 |
| Air Flow | High - Medium - Low | l/s | 183 - 153 - 130 |
| | High - Medium - Low | m ³ /h | 660 - 552 - 468 |
| Sound | Pressure High - Medium - Low | dB(A) | 41 - 36 - 32 |
| | Power High - Medium - Low | dB(A) | 56 - 51 - 47 |
| Unit | Height x Width x Depth | mm | 256 x 575 x 575 |
| | Weight | kg | 15 |
| Panel | Height x Width x Depth | mm | 12 x 620 x 620 |
| | Weight RBC-UM21PG(W)-E | kg | 2.5 |
| Pipe Connection | Flare Connections (gas - liquid) | inch | 1/2 - 1/4 |
| | Drain Pipe Connection OD/ID | mm | VP26/20 |
| Remote Controller | | | RBC-AMT32E |
| Power Cable | Outdoor to Indoor | | 3 core + earth |

Dimensional Drawings

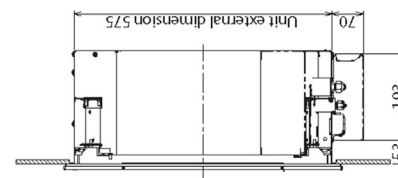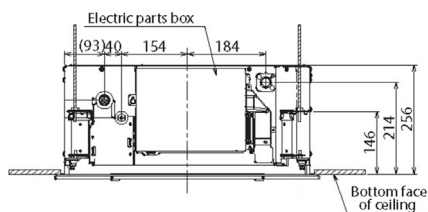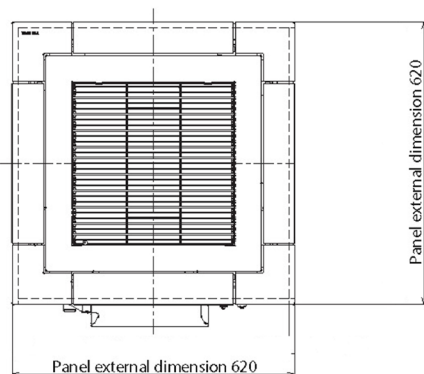

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

