


## Toshiba Air Conditioning - RAV-RM Data Sheet

### RAV-RM1101BTP-E

#### Ducted

#### Features



- Redesigned for use with refrigerant R32
- External static pressure can be raised up to 120 Pa
- Lift pump up to 850 mm lift or gravity drain
- Low noise: low fan speed down to 33 dB(A)
- Ideal for restricted ceiling voids only 275 mm high
- Base or rear return air with filter

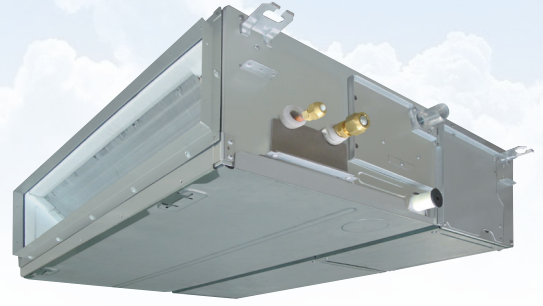

#### Technical Data

Model reference			RAV-RM1101BTP-E
Nominal	Cooling Capacity	kW	9.5
	Heating Capacity	kW	11.2
	EER/COP	W/W	3.18/3.75
UK	Cooling Total/Sensible	kW	9.10/7.37
	Heating	kW	8.01
Cooling EN14825	Range Min. - Max.	kW	3.0 - 11.2
	Power Input	kW	2.99
	Pdesign	kW	9.5
	SEER/Energy Efficiency Class		5.28/A
Heating EN14825	Seasonal Energy Consumption	kWh/a	696
	Range Min. - Max.	kW	3.0 - 13.0
	Power Input	kW	2.99
	Pdesign	kW	7.60
Air Flow	SCOP/Energy Efficiency Class		4.19/A+
	Seasonal Energy Consumption	kWh/a	2569
External Static Pressure	High - Medium - Low	l/s	583 - 458 - 350
	High - Medium - Low	m <sup>3</sup> /h	2100 - 1650 - 1260
Sound	Standard (Upper - Lower)	Pa	50 (120 - 30)
	Pressure High - Medium - Low	dB(A)	40 - 36 - 33
Unit	Power High - Medium - Low	dB(A)	55 - 51 - 48
	Height x Width x Depth	mm	275 x 1400 x 750
Pipe Connection	Weight	kg	40
	Flare Connections (gas - liquid)	inch	5/8 - 3/8
	Drain Pipe Connection Upper - Lower	mm	VP25 - VP25
Remote Controller	Lift Pump Drain Height from Unit Base	mm	< 850
			RBC-AMT32E
Power Cable	Outdoor to Indoor		3 core + earth

#### Dimensional Drawings

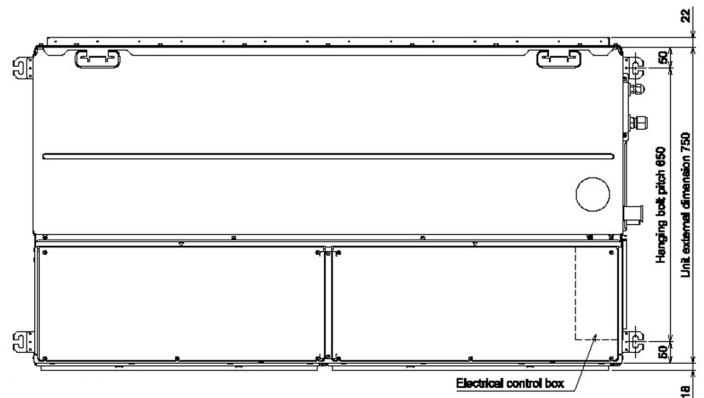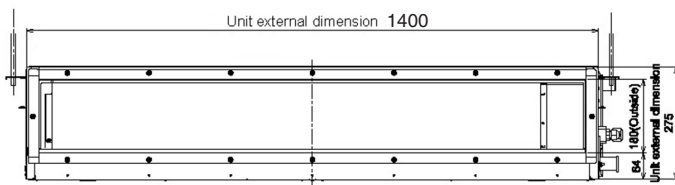

## Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

[www.cdlweb.info](http://www.cdlweb.info)

