


Toshiba Air Conditioning - RAV-RM Data Sheet

RAV-RM561BTP-E

Ducted

Features



- Redesigned for use with refrigerant R32
- External static pressure can be raised up to 120 Pa
- Lift pump up to 850 mm lift or gravity drain
- Low noise: low fan speed down to 25 dB(A)
- Ideal for restricted ceiling voids only 275 mm high
- Base or rear return air with filter

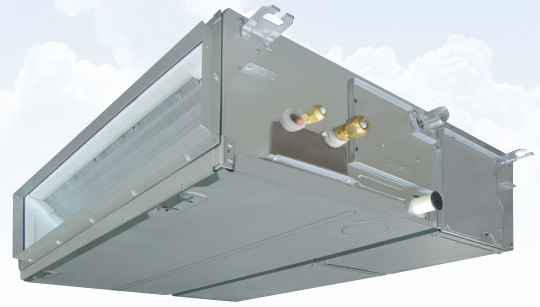

Technical Data

Model reference		RAV-RM561BTP-E	
Nominal	Cooling Capacity	kW	5.0
	Heating Capacity	kW	5.3
	EER/COP	W/W	2.73/3.27
UK	Cooling Total/Sensible	kW	4.80/3.60
	Heating	kW	3.79
Cooling EN14825	Range Min. - Max.	kW	1.5 - 5.6
	Power Input	kW	1.83
	Pdesign	kW	5.0
	SEER/Energy Efficiency Class		5.28/A
	Seasonal Energy Consumption	kWh/a	365
Heating EN14825	Range Min. - Max.	kW	1.5 - 6.3
	Power Input	kW	1.62
	Pdesign	kW	2.80
	SCOP/Energy Efficiency Class		4.08/A+
	Seasonal Energy Consumption	kWh/a	1549
Air Flow	High - Medium - Low	l/s	222 - 175 - 133
	High - Medium - Low	m ³ /h	800 - 630 - 480
External Static Pressure	Standard (Upper - Lower)	Pa	30 (120 - 30)
Sound	Pressure High - Medium - Low	dB(A)	33 - 29 - 25
	Power High - Medium - Low	dB(A)	48 - 44 - 40
Unit	Height x Width x Depth	mm	275 x 700 x 750
	Weight	kg	23
Pipe Connection	Flare Connections (gas - liquid)	inch	1/2 - 1/4
	Drain Pipe Connection Upper - Lower	mm	VP25 - VP25
	Lift Pump Drain Height from Unit Base	mm	< 850
Remote Controller			RBC-AMT32E
Power Cable	Outdoor to Indoor		3 core + earth

Dimensional Drawings

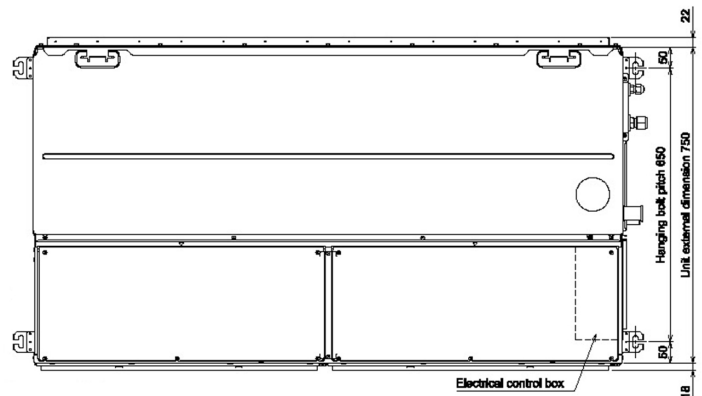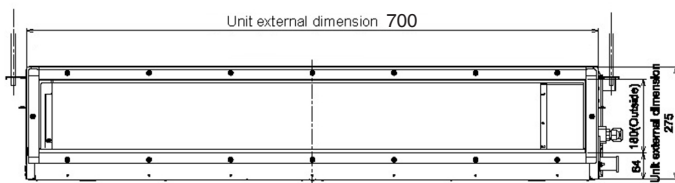

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

