


Toshiba Air Conditioning - RAV-RM Data Sheet

RAV-RM801BTP-E

Ducted

Features



- Redesigned for use with refrigerant R32
- External static pressure can be raised up to 120 Pa
- Lift pump up to 850 mm lift or gravity drain
- Low noise: low fan speed down to 26 dB(A)
- Ideal for restricted ceiling voids only 275 mm high
- Base or rear return air with filter

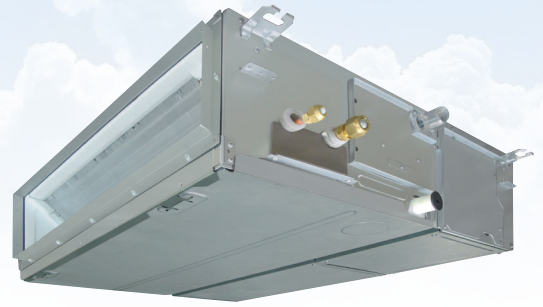

Technical Data

Model reference		RAV-RM801BTP-E	
Nominal	Cooling Capacity	kW	6.7
	Heating Capacity	kW	7.7
	EER/COP	W/W	2.82/3.32
UK	Cooling Total/Sensible	kW	6.30/4.90
	Heating	kW	5.51
Cooling EN14825	Range Min. - Max.	kW	1.5 - 7.4
	Power Input	kW	2.38
	Pdesign	kW	6.7
	SEER/Energy Efficiency Class		5.2/A
Heating EN14825	Seasonal Energy Consumption	kWh/a	466
	Range Min. - Max.	kW	1.5 - 9.0
	Power Input	kW	2.32
	Pdesign	kW	5.10
Air Flow	SCOP/Energy Efficiency Class		4.13/A+
	Seasonal Energy Consumption	kWh/a	2450
External Static Pressure	High - Medium - Low	l/s	333 - 258 - 200
	Standard (Upper - Lower)	m ³ /h	1200 - 930 - 720
Sound	High - Medium - Low	Pa	30 (120 - 30)
	Pressure High - Medium - Low	dB(A)	34 - 30 - 26
Unit	Power High - Medium - Low	dB(A)	49 - 45 - 41
	Height x Width x Depth	mm	275 x 1100 x 750
Pipe Connection	Weight	kg	30
	Flare Connections (gas - liquid)	inch	5/8 - 3/8
	Drain Pipe Connection Upper - Lower	mm	VP25 - VP25
Remote Controller	Lift Pump Drain Height from Unit Base	mm	< 850
			RBC-AMT32E
Power Cable	Outdoor to Indoor		3 core + earth

Dimensional Drawings

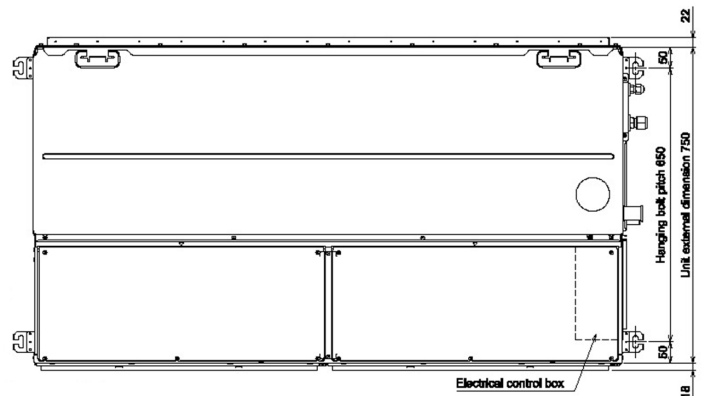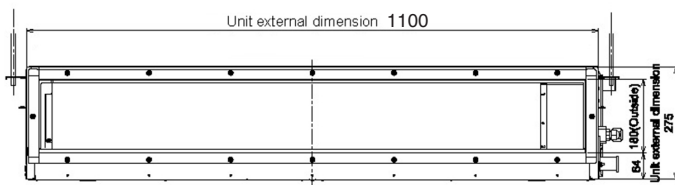

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

