

Toshiba Air Conditioning - RAV-RM Data Sheet

RAV-RM801KRTP-E High-Wall



Features


- Redesigned for use with refrigerant R32
- Self-cleaning feature
- Automatic louvre swing pattern to distribute the air evenly into the room
- Wireless remote controller with pre-set functions or hard-wired remote controller option

Technical Data

Model reference			RAV-RM801KRTP-E
Nominal	Cooling Capacity	kW	6.7
	Heating Capacity	kW	7.7
	EER/COP	W/W	2.75/2.95
UK	Cooling Total/Sensible	kW	6.36/4.66
	Heating	kW	5.51
Cooling EN14825	Range Min. - Max.	kW	1.5 - 8.0
	Power Input	kW	2.44
	Pdesign	kW	-*
	SEER/Energy Efficiency Class		5.73/A+
Heating EN14825	Range Min. - Max.	kW	1.5 - 9.0
	Power Input	kW	2.61
	Pdesign	kW	-*
	SCOP/Energy Efficiency Class		4.01/A+
Air Flow	High - Medium - Low	l/s	289 - 253 - 189
	High - Medium - Low	m ³ /h	1040 - 910 - 680
Sound	Pressure High - Medium - Low	dB(A)	45 - 41 - 35
	Power High - Medium - Low	dB(A)	60 - 56 - 51
Unit	Height x Width x Depth	mm	320 x 1050 x 250
	Weight	kg	14
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 - 3/8
	Drain Pipe Connection OD/ID	mm	VP16/14
Remote Controller			WH-TA09NE (Infra-red)
Power Cable	Outdoor to Indoor		3 core + earth

* Waiting for published data.

Dimensional Drawings

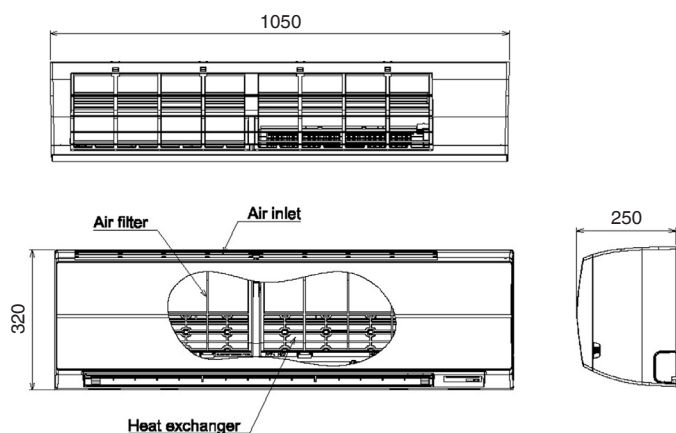

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info



All UK duties are based on Cooling Indoor air temperature 22°C DB/16°C WB Outdoor air temperature 28°C DB 50% RH, high fan speed, 5 m pipe run.
Heating Indoor air temperature 20°C DB Outdoor air temperature -5°C DB 100% RH, high fan speed, 5 m pipe run. Values are based on the maximum compressor output.
Data obtained from Toshiba Air Conditioning Published Data July 2018.