


Toshiba Air Conditioning - RAV-GM Data Sheet

RAV-GM801UT-E 4-Way Smart Cassette

Features




- New elegant flat panel design
- Perfect grid ceiling fitment
- High-efficiency heat exchanger with magic coil treatment
- Unique louvre design for strong or weak directional air diffusion
- 5-step air flow control

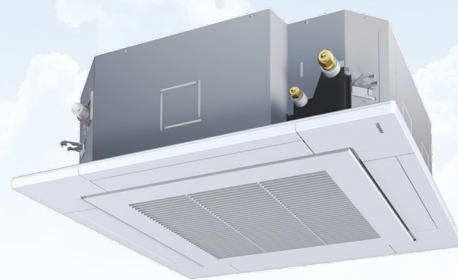

Technical Data

Model reference			RAV-GM801UT-E
Nominal	Cooling Capacity	kW	7.1
	Heating Capacity	kW	8.0
	EER/COP	W/W	5.18/5.52
UK	Cooling Total/Sensible	kW	7.4/6.2
	Heating	kW	5.25
Cooling EN14825	Range Min. - Max.	kW	1.9 - 8.0
	Power Input	kW	1.37
	Pdesign	kW	7.1
	SEER/Energy Efficiency Class		9.40/A+++
	Seasonal Energy Consumption	kWh/a	264
Heating EN14825	Range Min. - Max.	kW	1.3 - 11.3
	Power Input	kW	1.45
	Pdesign	kW	5.1
	SCOP/Energy Efficiency Class		5.51/A+++
	Seasonal Energy Consumption	kWh/a	1294
Air Flow	High - Medium - Low	l/s	533 - 36 - 225
	High - Medium - Low	m³/h	1920 - 129 - 810
Sound	Pressure High - Medium - Low	dB(A)	42 - 35 - 27
	Power High - Medium - Low	dB(A)	56 - 49 - 43
Unit	Height x Width x Depth	mm	319 x 840 x 840
	Weight	kg	25
Panel	Height x Width x Depth	mm	30 x 950 x 950
	Weight RBC-U41PG(W)-E	kg	5
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 - 3/8
	Drain Pipe Connection OD/ID	mm	VP32/25
Remote Controller			RBC-AMT32E
Power Cable	Outdoor to Indoor		3 core + earth

Dimensional Drawings

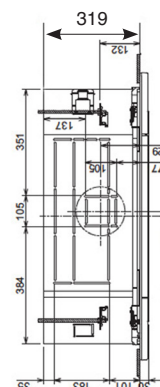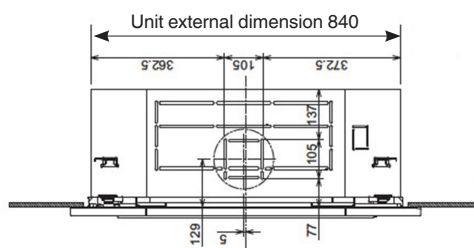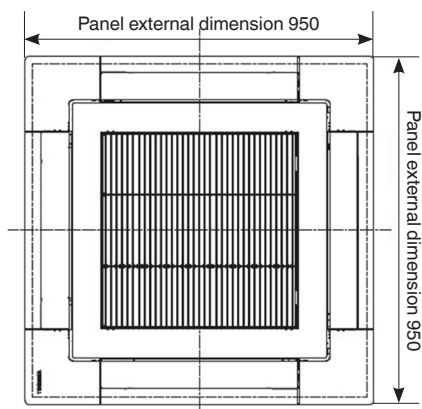

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

