TOSHIBA Leading Innovation >>>

Toshiba Air Conditioning - Controls Data Sheet

TCB-SC643TLE Central Remote Controller

Features

- Easy control and simple monitoring for multiple indoor units up to 64 air conditioners, which can be split over 1 to 10 zones
- Multiple display mode for flexible control and monitoring (All, Zone, Unit)
- Easy touch-panel operation




Technical Data

Model reference		TCB-SC643TLE	
Total dimensions $(H \times W \times D)$	mm	120 x 120 x 20 (total 70.6)	
Weight	kg	0.55	
Power supply	V/ph/Hz	220-240/1/50	
Operating range	°C	0-40	
Humidity	%	10-90	
Input/output terminal		Output: 2 (operation/warning) Input: 2 (all run/all stop)	
External device		Schedule timer: TCB-EXS21TLE	

Functions	Monitor
ON/OFF	\checkmark
Mode	1
Temperature setting	1
Fan speed	1
Timer function	1
Schedule function	1
Permit/prohibit function	1
Filter dirty indicator	1
Error display	1

Dimensional Drawings

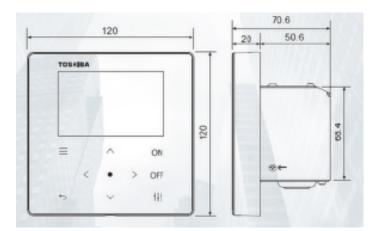

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info



All UK duties are based on Cooling Indoor air temperature 22°C DB/16°C WB Outdoor air temperature 28°C DB 50% RH, high fan speed, 5 m pipe run. Heating Indoor air temperature 20°C DB Outdoor air temperature -5°C DB 100% RH, high fan speed, 5 m pipe run. Values are based on the maximum compressor output. Data obtained from Toshiba Air Conditioning Published Data September 2014.