

Toshiba Air Conditioning - Controls Data Sheet

RBC-ASC11E

Compact Wired Remote Controller

Features

- Compatible with all light-commercial and VRF indoor units*
- Compact size: 86 x 86 x 16 mm
- Stylish design with large backlit screen
- Timer off function
- Temperature setting available in 0.5°C increments
- Temperature setting range 18-29°C





* Not compatible with RAS and RAS multi-split systems.

Technical Data

| | | |
|------------------------------|----|--------------|
| Model reference | | RBC-ASC11E |
| Total dimensions (H x W x D) | mm | 86 x 86 x 16 |
| Maximum wired length | m | 500 |

| Functions | Setting | Monitor |
|--------------------|---------------------------------|---------|
| On/Off | ✓ | ✓ |
| Mode | Auto, Heat, Cool, Dry, Fan Only | ✓ |
| Set point | 18-29°C | ✓ |
| Fan speed | Auto, High, Medium, Low | ✓ |
| Louvre | Swing, Fix | ✓ |
| Timer | Off Only | ✓ |
| Error code display | ✓ | ✓ |
| Remote sensor | ✓ | ✓ |
| Central control | ✓ | ✓ |

Dimensional Drawings

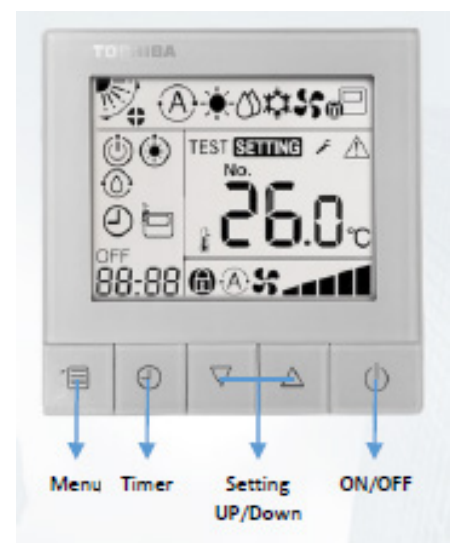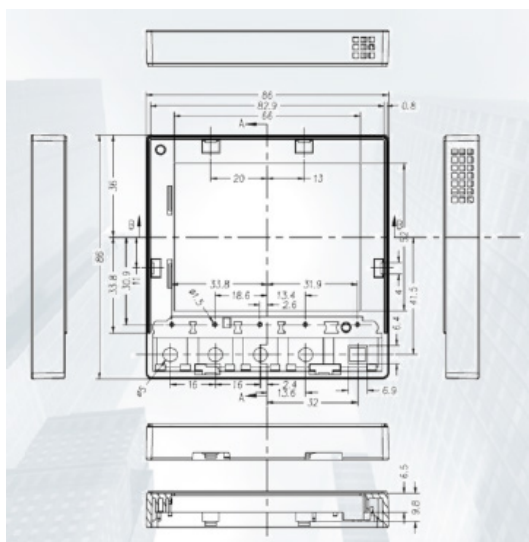

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info



All UK duties are based on Cooling Indoor air temperature 22°C DB/16°C WB Outdoor air temperature 28°C DB 50% RH, high fan speed, 5 m pipe run.
 Heating Indoor air temperature 20°C DB Outdoor air temperature -5°C DB 100% RH, high fan speed, 5 m pipe run. Values are based on the maximum compressor output.
 Data obtained from Toshiba Air Conditioning Published Data September 2014.