

Toshiba Air Conditioning - VRF Data Sheet

MMU-AP0127MH-E Compact 4-way cassette

Features


- Individual louvre
- Fits within T-bar of ceiling grid
- Optional Occupancy Sensor (TCB-SIR41UM-E)



Technical Data

Model reference		MMU-AP0127MH-E
Nominal cooling	kW	3.6
Nominal heating	kW	4.0
Capacity code		1.3
Power input (cool/heat)	kW	0.027
UK cooling	kW	3.3
UK sensible cooling	kW	2.5
UK heating	kW	2.2
Starting current	A	0.44
Running current	A	0.25
Suggested fuse size	A	3
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		2-core screened 1.5 mm
Sound power H-M-L	dB(A)	53-49-45
Sound pressure H-M-L	dB(A)	38-34-30
Air flow H-L	m ³ /h	594-402
Air flow H-L	l/s	165-112
Dimensions (H x W x D)	mm	256 x 575 x 575
Unit weight	kg	15
Panel reference		RBC-UM21PG(W)-E
Panel dimensions (H x W x D)	mm	12 x 620 x 620
Panel weight	kg	2.5
Connection (liquid - gas)	mm (inch)	6.4 (1/4) - 9.5 (3/8)
Drain port OD/ID		VP26/20
Drain pump lift	mm	850

Dimensional Drawings

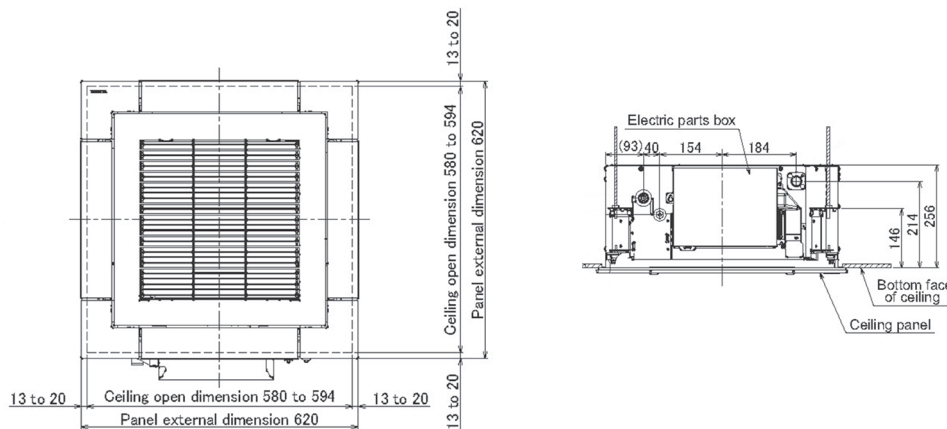

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

