

LIGHT COMMERCIAL SOLUTIONS

SALSA

CASSETTE INVERTER AIR CONDITIONER

AMK 800*800
(24 to 60 btu/hr)



AMK 600*600
(12 to 18 btu/hr)



R32 



REVERSIBLE UNIT WITH FULL
INVERTER TECHNOLOGY



360° AIRFLOW DISTRIBUTION PANEL
TO GARANTEE AN HOMOGENEOUS
DIFFUSION IN THE ROOM SPACE,
EVEN WITH HIGH CEILING HEIGHT



COMPACT AND STANDARD SIZE
FOR A PERFECT INTEGRATION
INTO FALSE CEILING



EASY INSTALLATION
AND MAINTENANCE
WITH THE PANEL REMOVAL



DUAL REFRIGERANT
(R410A/R32) INDOOR UNITS
TO REDUCE INVENTORY





TECHNICAL CHARACTERISTICS



SALSA								
TECHNICAL CHARACTERISTICS		12K btu/hr*	18K btu/hr	24K btu/hr	36K btu/hr (Mono)	36K btu/hr (Tri)	48K btu/hr (Tri)	60K btu/hr (Tri)
Cooling capacity	kW	3.5	5.2	7.05	10.5	10.5	14	15.4
P design capacity cooling	kW	3.50	5.30	7.05	10.50	10.50	14.00	15.4
Temp range cooling	°C	-15-50	-15-50	-15-50	-15-50	-15-50	-15-50	-15-50
SEER	W/W	7.8	6.1	6.01	6.1	6.1	6.1	6.1
EER	W/W	4.1	3.2	2.9	2.6	2.8	2.7	2.5
Energy label		A++	A++	A++	A++	A++	A++	A++
Yearly energy consumption	kWh	158	305	405	602	602	803	884
Heating capacity	kW	4.3	5.4	7.2	10.6	10.8	15.6	18
Heating capacity at -7°C	kW	na	na	5.40	9.70	9.60	10.50	12.2
Heating capacity at -10°C	kW	na	na	5.00	8.30	8.20	10.00	11.9
Heating capacity at -15°C	kW	na	na	3.70	8.20	8.10	8.50	9.8
P design capacity heating (warmer)	kW	3.50	4.20	5.90	10.50	10.50	11.80	12.3
P design capacity heating (average)	kW	3.10	5.30	5.30	8.70	8.10	11.00	11.8
Temp range heating	°C	-15-24	-15-24	-15-24	-15-24	-15-24	-15-24	-15-24
SCOP (average) / SCOP (warmer)	W/W	4.6/5.1	4.0/4.9	4.0/5.1	4.0/4.9	4.0/4.9	4.0/4.6	4.0/5.1
SCOP	W/W	4	3.7	3.9	3.5	3.7	3.10	2.9
Energy label		A++/A+++	A+/A++	A+/A+++	A+/A+++	A+/A+++	A+/A+++	A+ / A+++
Yearly energy consumption	kWh	944/961	1470/1515	1855/1620	3045/3000	2835/3000	3850 / 3591	4130 / 3376

INDOOR UNIT		42HK12V58C	42HK18V58C	42HK24VR8C	42HK36VR8C	42HK36VR8C	42HK48VR8C	42HK60VR8C
Sound power level	dB(A)	51	56	61	62	62	65	65
Sound pressure level (high/med/low)	dB(A)	41/36/33	42.5/39/35.5	46 / 43 / 40	51 / 49 / 46	51 / 49 / 46	52 / 50 / 49	53 / 50 / 48
Air flow (high/med/low)	m ³ /h	617/504/416	720/625/540	1380 / 1200 / 1030	1770 / 1620 / 1440	1770 / 1620 / 1440	1720 / 1570 / 1380	1970 / 1740 / 1540
Weight	kg	16.2	16.2	24	27.5	27.5	29	29
Dimensions (WxDxH)	mm	570x570x260	570x570x260	840x840x205	840x840x245	840x840x245	840x840x287	840x840x287

OUTDOOR UNIT		38HU12V58C	38HU18V58C	38HU24V58C	38HU36V58C	38HU36VT8C	38HU48VT8C	38HU60VT8C
Sound power level	dB(A)	61	63	67	69	69	75	77
Sound pressure level	dB(A)	55.5	55.5	61	64	64	66	66
Airflow	m ³ /h	2000	2000	2700	4000	4000	7500	7500
Weight	kg	34.7	33.7	49.5	67	81.5	107	112
Dimensions (WxDxH)	mm	800x333x554	800x333x554	845x363x702	946x410x810	946x410x810	952x415x1333	952x415x1333
Refrigerant amount	kg	0.87	1.15	1.50	2.40	2.40	2.8	3
Liquid side/ Gas side	inch	(1/4") / (3/8")	(1/4") / (1/2")	(3/8" / 5/8")	(3/8" / 5/8")	(3/8" / 5/8")	(3/8" / 5/8")	(3/8" / 5/8")
Standard piping length	m	5	5	5	5	5	5	5
Min piping length	m	3	3	3	3	3	3	3
Max piping length	m	25	30	50	65	65	65	65
Max height difference	m	10	20	25	30	30	30	30
Recommended additional charge	g/m	12	12	24	24	24	24	24
Voltage	V-ph-Hz	220-240V / 50Hz / 1Ph	220-240V / 50Hz / 1Ph	220-240V / 50Hz / 1Ph	220-240V / 50Hz / 1Ph	380-415V / 50Hz / 3Ph	380-415V / 50Hz / 3Ph	380-415V / 50Hz / 3Ph
Standard current (cooling)	A	3.8	7.2	9.9	16.5	6.6	9.2	10.2
Standard input (cooling)	W	850	1633	2180	3740	3950	5150	6080
Standard current (heating)	A	5	6.4	8.4	13.3	5	8.2	10.3
Standard input (heating)	W	1100	1460	1830	2970	2910	5040	6130

*Preliminary data

KEY FEATURES

- Washable filter.
- Refrigerant leak detection.
- Fresh air inlet Plugin.
- Wireless remote control.

CONTROLS




Wireless remote control (supplied as standard)



Wired control (option)



Central wired control Up to 64 units (option)

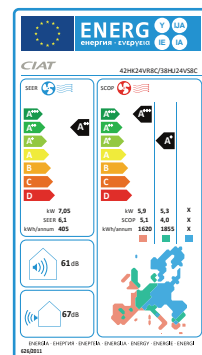

www.ciat.uk.com