

Toshiba Air Conditioning - RAV-GM Data Sheet

RAV-GM1101KRTP-E High-Wall

Features

- For use with refrigerant R32
- Easy installation
- Special coating fan coil unit fin (magic coil)
- Wireless remote controller with pre-set functions or hard-wired remote controller option




Technical Data

Model reference			RAV-GM1101KRTP-E
Nominal	Cooling Capacity	kW	9.5
	Heating Capacity	kW	11.2
	EER/COP	W/W	3.20/3.23
UK	Cooling Total/Sensible	kW	9.5/???
	Heating	kW	8.0
Cooling EN14825	Range Min. - Max.	kW	3.0 - 11.2
	Power Input	kW	2.97
	Pdesign	kW	9.5
	SEER/Energy Efficiency Class		6.1/A++
	Seasonal Energy Consumption	kWh/a	-*
Heating EN14825	Range Min. - Max.	kW	3.0 - 13.0
	Power Input	kW	3.47
	Pdesign	kW	8.0
	SCOP/Energy Efficiency Class		4.2/A+
	Seasonal Energy Consumption	kWh/a	-*
Air Flow	High - Medium - Low	l/s	447 - 375 - 328
	High - Medium - Low	m ³ /h	1610 - 1350 - 1180
Sound	Pressure High - Medium - Low	dB(A)	49 - 45 - 41
	Power High - Medium - Low	dB(A)	64 - 60 - 56
Unit	Height x Width x Depth	mm	348 x 1200 x 280
	Weight	kg	19
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 - 3/8
	Drain Pipe Connection OD/ID	mm	VP16/14
Remote Controller			WH-TA09NE (Infra-red)
Power Cable	Outdoor to Indoor		3 core + earth

* Waiting for published data.

Dimensional Drawings

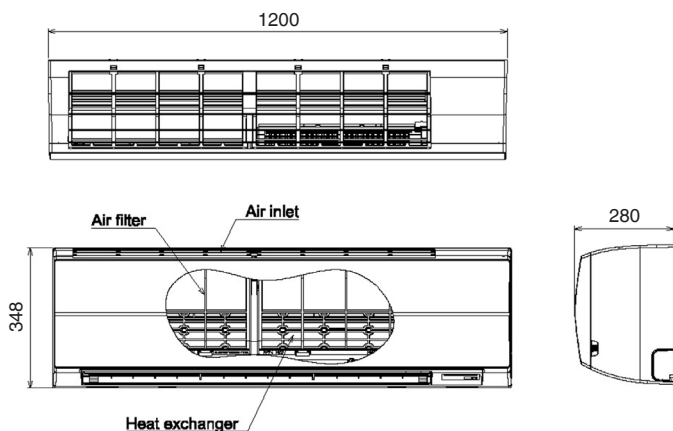

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info



All UK duties are based on Cooling Indoor air temperature 22°C DB/16°C WB Outdoor air temperature 28°C DB 50% RH, high fan speed, 5 m pipe run.
Heating Indoor air temperature 20°C DB Outdoor air temperature -5°C DB 100% RH, high fan speed, 5 m pipe run. Values are based on the maximum compressor output.
Data obtained from Toshiba Air Conditioning Published Data July 2018.