

Toshiba Air Conditioning - RAV-RM Data Sheet

RAV-RM1101FT-ES Floor-mounted cabinet



Features


- Connectable to both R32 and R410A DI and SDI outdoor units
- Large capacity range: cooling capacities from 5 kW to 16 kW, heating capacities from 5.6 kW to 18 kW
- Refrigerant leakage sensor performance guaranteed for 7 years (R32 refrigerant only)
- Remote controller RBC-AMS55E-ES built into indoor cabinet

Technical Data

Model reference			RAV-RM1101FT-ES
Nominal	Cooling Capacity	kW	10.0
	Heating Capacity	kW	11.2
	EER/COP	W/W	3.18/3.68
UK	Cooling Total/Sensible	kW	-.*
	Heating	kW	-.*
Cooling EN14825	Range Min. - Max.	kW	2.6 - 12.0
	Power Input	kW	3.14
	Pdesign	kW	-.*
	SEER/Energy Efficiency Class		5.45/A
	Seasonal Energy Consumption	kWh/a	-.*
Heating EN14825	Range Min. - Max.	kW	2.4 - 13.0
	Power Input	kW	3.04
	Pdesign	kW	-.*
	SCOP/Energy Efficiency Class		3.96/A
	Seasonal Energy Consumption	kWh/a	-.*
Air Flow	High - Low	L/s	461 - 331
	High - Low	m ³ /h	1660 - 1190
Sound	Pressure High - Medium - Low	dB(A)	51 - 46 - 41
	Power High - Medium - Low	dB(A)	65 - 61 - 55
Unit	Height x Width x Depth	mm	1750 x 600 x 390
	Weight	kg	59
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 - 3/8
Remote Controller			RBC-AMS55E-ES
Power Cable	Outdoor to Indoor		3 core + earth

* Waiting for published data.

Dimensional Drawings

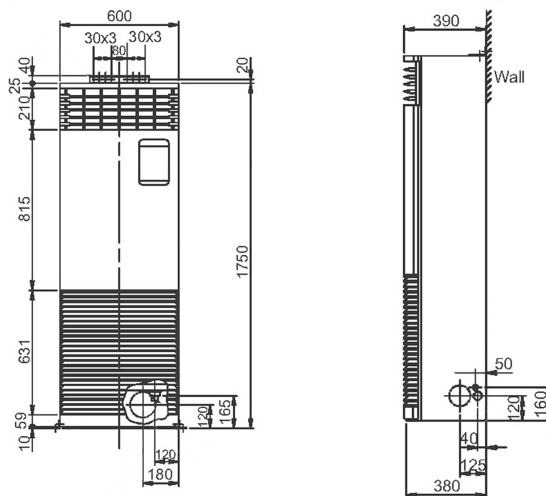

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

