

Toshiba Air Conditioning - RAV-RM Data Sheet

RAV-RM1401FT-ES Floor-mounted cabinet



Features


- Connectable to both R32 and R410A DI and SDI outdoor units
- Large capacity range: cooling capacities from 5 kW to 16 kW, heating capacities from 5.6 kW to 18 kW
- Refrigerant leakage sensor performance guaranteed for 7 years (R32 refrigerant only)
- Remote controller RBC-AMS55E-ES built into indoor cabinet

Technical Data

Model reference			RAV-RM1401FT-ES
Nominal	Cooling Capacity	kW	12.5
	Heating Capacity	kW	14.0
	EER/COP	W/W	2.55/3.23
UK	Cooling Total/Sensible	kW	-.*
	Heating	kW	-.*
Cooling EN14825	Range Min. - Max.	kW	2.6 - 14.0
	Power Input	kW	4.90
	Pdesign	kW	-.*
	SEER/Energy Efficiency Class		5.30/-
	Seasonal Energy Consumption	kWh/a	-.*
Heating EN14825	Range Min. - Max.	kW	2.4 - 16.5
	Power Input	kW	4.33
	Pdesign	kW	-.*
	SCOP/Energy Efficiency Class		4.04/-
	Seasonal Energy Consumption	kWh/a	-.*
Air Flow	High - Low	L/s	489 - 375
	High - Low	m ³ /h	1760 - 1350
Sound	Pressure High - Medium - Low	dB(A)	53 - 48 - 45
	Power High - Medium - Low	dB(A)	67 - 62 - 59
Unit	Height x Width x Depth	mm	1750 x 600 x 390
	Weight	kg	59
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 - 3/8
Remote Controller			RBC-AMS55E-ES
Power Cable	Outdoor to Indoor		3 core + earth

* Waiting for published data.

Dimensional Drawings

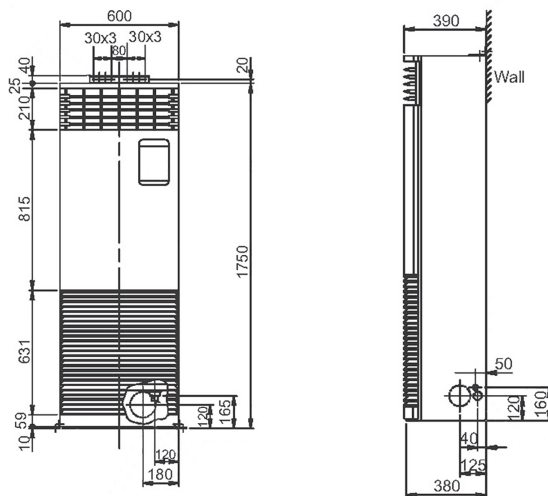

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

