

Toshiba Air Conditioning - RAV-RM Data Sheet

RAV-RM801FT-ES Floor-mounted cabinet



Features


- Connectable to both R32 and R410A DI and SDI outdoor units
- Large capacity range: cooling capacities from 5 kW to 16 kW, heating capacities from 5.6 kW to 18 kW
- Refrigerant leakage sensor performance guaranteed for 7 years (R32 refrigerant only)
- Remote controller RBC-AMS55E-ES built into indoor cabinet

Technical Data

Model reference			RAV-RM801FT-ES
Nominal	Cooling Capacity	kW	7.1
	Heating Capacity	kW	8.0
	EER/COP	W/W	2.58/3.18
UK	Cooling Total/Sensible	kW	-.*
	Heating	kW	-.*
Cooling EN14825	Range Min. - Max.	kW	1.9 - 8.0
	Power Input	kW	2.75
	Pdesign	kW	-.*
	SEER/Energy Efficiency Class		4.93/B
Heating EN14825	Range Min. - Max.	kW	1.3 - 10.6
	Power Input	kW	2.52
	Pdesign	kW	-.*
	SCOP/Energy Efficiency Class		3.80/A
Air Flow	High - Low	L/s	258 - 178
	High - Low	m ³ /h	930 - 640
Sound	Pressure High - Medium - Low	dB(A)	50 - 45 - 41
	Power High - Medium - Low	dB(A)	64 - 60 - 54
Unit	Height x Width x Depth	mm	1750 x 600 x 210
	Weight	kg	45
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 - 3/8
Remote Controller			RBC-AMS55E-ES
Power Cable	Outdoor to Indoor		3 core + earth

* Waiting for published data.

Dimensional Drawings

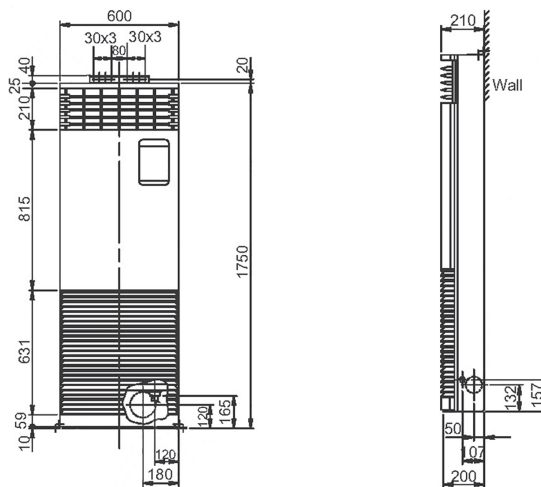

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

