TOSHIBA Leading Innovation >>>

Toshiba Air Conditioning - RAS Data Sheet

RAS-B13J2KVG-E Seiya High-Wall Inverter


Features

- Designed for use with refrigerant R32
- A new design that improves the energy efficiency of entry-tier level to A++/A+
- Extremely quiet operation down to as low as 19 dB(A)
- New high-wall with dustless heat exchanger for improved efficiency
- High-power, self-cleaning, ECO, off timer, swing and heating only compatibility
- Extra features with the optional controller: power select, comfort sleep, on-off timer, 8°C and weekly timer


Technical Data

Model reference indoor unit		RAS-B13J2KVG-E
Nominal cooling	kW	3.3
Nominal heating	kW	3.6
UK cooling	kW	3.22
UK sensible cooling	kW	2.49
UK heating	kW	2.20
Sound pressure (high/low)	dB(A)	42/21
Air flow (high/low)	m³/h	618/264
Dimensions (H x W x D)	mm	293 x 798 x 230
Unit weight	kg	9
Model reference outdoor unit		RAS-13J2AVG-E
Maximum running current	А	5.50
Suggested fuse size	А	10
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		3-core + earth
Sound pressure (cool/heat)	dB(A)	48/50
Air flow (high)	m³/h	1980
Dimensions (H x W x D)	mm	530 x 660 x 240
Unit weight	kg	24
Pipe sizes (liquid-suction)	inch	1/4-3/8
Maximum pipe length/height difference	m	15/12
Pre-charge pipe length	m	15
Factory charge	kg	0.46
EER/COP		3.00/3.91
SEER/SCOP		6.10/4.00

Dimensional Drawings

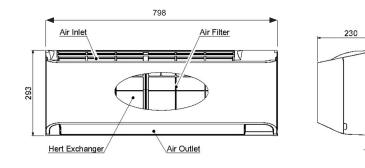





Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info



All UK duties are based on Cooling Indoor air temperature 22°C DB/16°C WB Outdoor air temperature 28°C DB 50% RH, high fan speed, 5 m pipe run. Heating Indoor air temperature 20°C DB Outdoor air temperature -5°C DB 100% RH, high fan speed, 5 m pipe run. Values are based on the maximum compressor output. Data obtained from Toshiba Air Conditioning Published Data July 2019.

55

50