


Toshiba Air Conditioning - RAV-GM Data Sheet

RAV-GM2801AT8-E Outdoor Unit

Features

- Redesigned for use with refrigerant R32
- New compressor design
- Reduced refrigerant charge - 5 kg
- Flexible, can be utilised for twin, triple and quad indoor applications
- Compact size

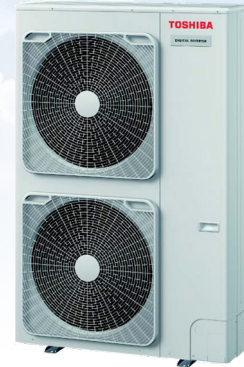


Technical Data

Model reference		RAV-GM2801AT8-E
Nominal cooling	kW	22.5
Nominal heating	kW	27.0
Maximum air flow	m ³ /h	10890
Maximum air flow	l/s	3025
Sound power (cool/heat)	dB(A)	78/80
Sound pressure (cool/heat)	dB(A)	61/63
Dimensions (H x W x D)	mm	1550 x 1010 x 370
Unit weight	kg	142
Power supply	V-ph-Hz	380/415-3-50
Interconnecting cable		3 core + earth
Suggested fuse size	A	20
Maximum operating current (cooling)	A	-*
Operating range, cooling	°C	-15 to 46
Operating range, heating	°C	-27 to 15
Pipe sizes (liquid - suction)	inch	1/2 - 1-1/8
Minimum/maximum pipe length	m	5/60
Maximum height difference	m	30
Pre-charge pipe length	m	30

* Waiting for published data

Dimensional Drawings

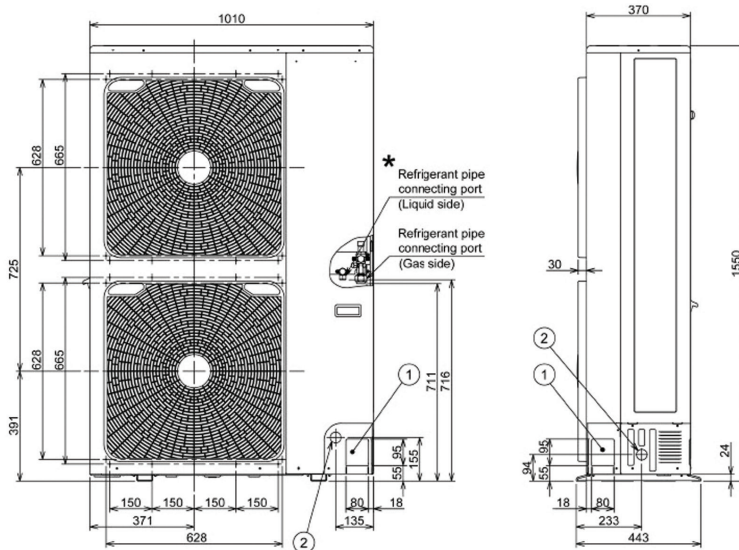

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

